
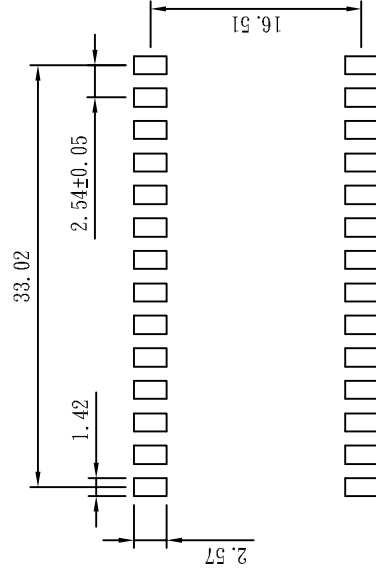
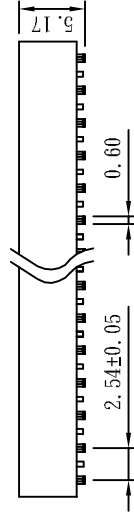


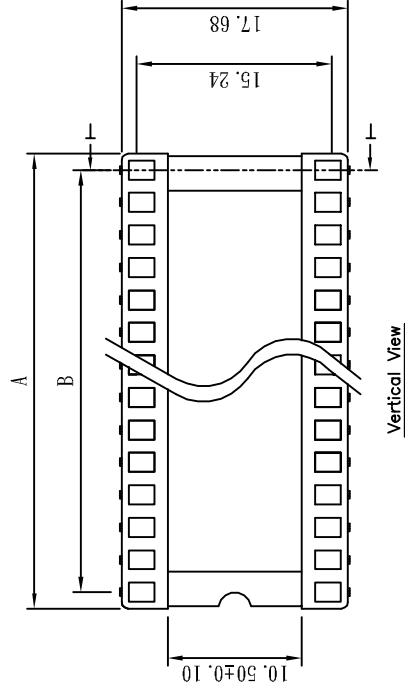

P.C.B Layout

1. MATERIAL:


- 1.1 CONTACT: PHOSPHOR BRONZE.
- 1.2 INSULATOR: Nylon 6T or PBT (UL94V-0).
- 1.3 FINISH: TIN ALLOY OVER COPPER.

2. SPECIFICATIONS:

- 2.1 INSULATOR RESISTANCE: 100,000M ohm min. at 500V DC.
- 2.2 DIELECTRIC WITHSTANDING: AC 1000V for 1 minute.

3. NOTE:

- 3.1 TOLERANCE ON ALL DIMENSION $\pm 0.20\text{mm}$ UNLESS OTHERWISE SPECIFIED.

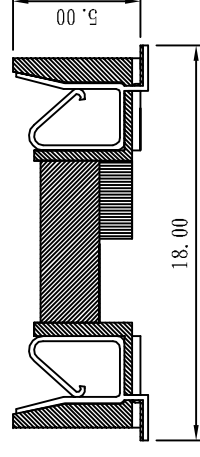

DIMENSION LIST

PIN	MM(INCH)	A ⁺ _{-0.20}	B $\pm$ 0.20	C $\pm$ 0.20
IC-V06-24	24 PIN	30.48	27.94	25.08
IC-V06-28	28 PIN	35.56	33.02	30.16
IC-V06-32	32 PIN	40.64	38.10	35.24
IC-V06-40	40 PIN	50.80	48.26	45.40

 ORETHANALL CONNECTORS ASSEMBLIES 煜倫有限公司		PART NO. IC-V06-xx		TOLERANCES ARE .X ± 0.3 .XX ± 0.2 .XXX ± 0.1 AWG		DESCRIPTION: IC SOCKET 15.24(0.6")WIDTH SMD TYPE		REVISIONS HK DATE	
DWG NO. IC-V06-xx		CHECKED BY CY							
FILE NO.		DRAWING BY							
UNIT / mm		SCALE 1 : 1							
		PROJECTION							