

NOTE:




ELECTRICAL:

- 1.VOLTAGE RATING : AC30V
- 2.CURRENT RATING : AC0.5A(SIGNAL); AC 1A(GROUND)
- 3.CONTACT RESISTANCE : 80MILLIOHMS MAX(SIGNAL);
35MILLIOHMS MAX(GROUND)
- 4.INSULATION RESISTANCE : 550 MEGOHMS MIN @ 550 VDC.
- 5.DIELECTRIC WITHSTANDING VOLTAGE : 30 VAC.

MECHANICAL:

- 1.FRONT SHELL : ZINC DIE CASTING, NICKEL PLATED
- 2.HOUSING MATERIAL : LCP UL94V-0.
- 3.SPRING : SUS 304.
- 4.CONTACT MATERIAL : PHOSPHER BRONZE
PLATING : CONTACT 30μ"SELECTIVE GOLD / 100μ" TIN
PLATING OVER 100μ" NICKEL.

RECOMMEND P.C.B LAYOUT

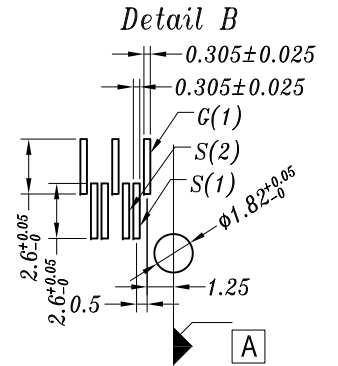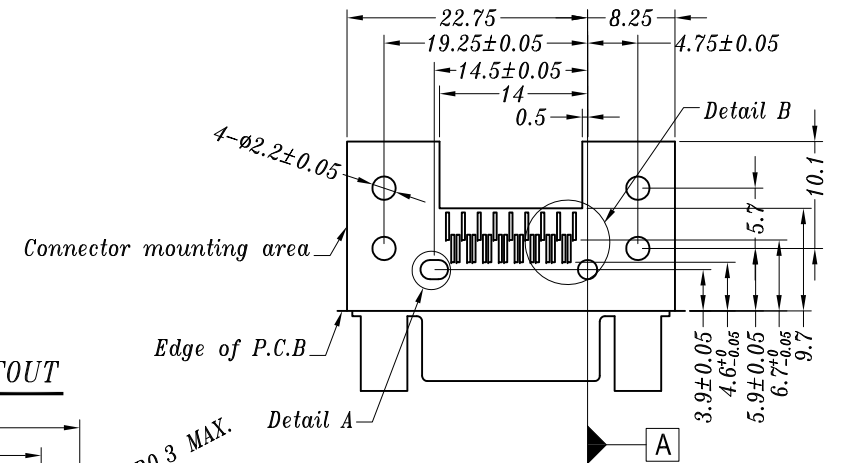

IFB-SWSPH3-08-LF
LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. IFB-SWSPH3-08

DWG NO. IFB-SWSPH3-08

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司