




Detail A

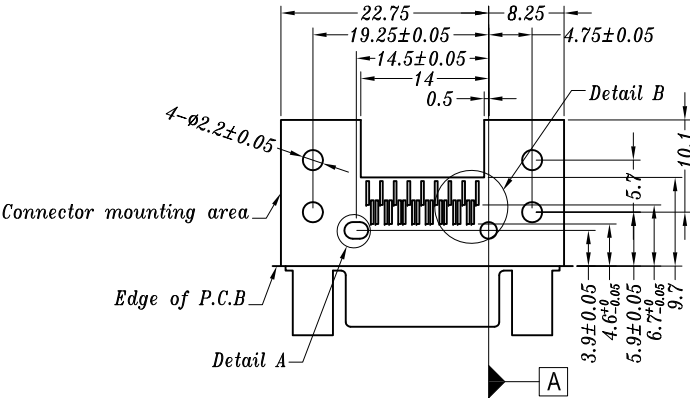

Detail B



RECOMMEND P.C.B LAYOUT

- NOTE:**
ELECTRICAL:
 1.VOLTAGE RATING : AC30V
 2.CURRENT RATING : AC0.5A(SIGNAL); AC 1A(GROUND)
 3.CONTACT RESISTANCE : 80MILLIOHMS MAX(SIGNAL);
 35MILLIOHMS MAX(GROUND)
 4.INSULATION RESISTANCE : 550 MEGOHMS MIN @ 550 VDC.
 5.DIELECTRIC WITHSTANDING VOLTAGE : 30 VAC.

- MECHANICAL:**
 1.FRONT SHELL : ZINC DIE CASTING, NICKEL PLATED
 2.HOUSING MATERIAL : LCP UL94V-0.
 3.SPRING : SUS 304.
 4.CONTACT MATERIAL : PHOSPHER BRONZE
 PLATING : CONTACT 30μ"SELECTIVE GOLD / 100μ" TIN
 PLATING OVER 100μ" NICKEL.
 5.BOARD LOCK : PHOSPHOR BRONZE W/TIN PLATED

IFB-SWSPZ2-08-LF
 LEADFREE

RoHS Compliant

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. IFB-SWSPZ2-08

DWG NO. IFB-SWSPZ2-08

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司