
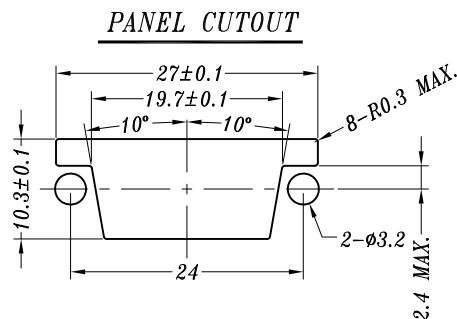

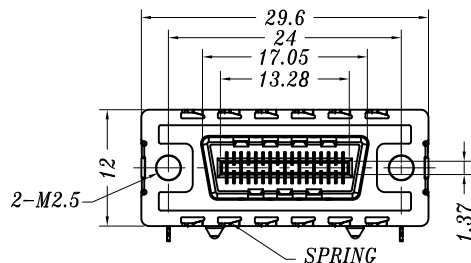





NOTE:


ELECTRICAL:

- 1.VOLTAGE RATING : AC30V
- 2.CURRENT RATING : AC0.5A(SIGNAL); AC 1A(GROUND)
- 3.CONTACT RESISTANCE : 80MILLIOHMS MAX(SIGNAL);
35MILLIOHMS MAX(GROUND)
- 4.INSULATION RESISTANCE : 550 MEGOHMS MIN @ 550 VDC.
- 5.DIELECTRIC WITHSTANDING VOLTAGE : 30 VAC.


MECHANICAL:

- 1.FRONT SHELL : ZINC DIE CASTING, NICKEL PLATED
- 2.HOUSING MATERIAL : LCP UL94V-0.
- 3.SPRING : SUS 304.
- 4.CONTACT MATERIAL : PHOSPHOR BRONZE
PLATING : CONTACT 30u"SELECTIVE GOLD / 100u" TIN
PLATING OVER 100u" NICKEL.
- 5.BOARD LOCK : PHOSPHOR BRONZE W/TIN PLATED



RECOMMEND P.C.B LAYOUT

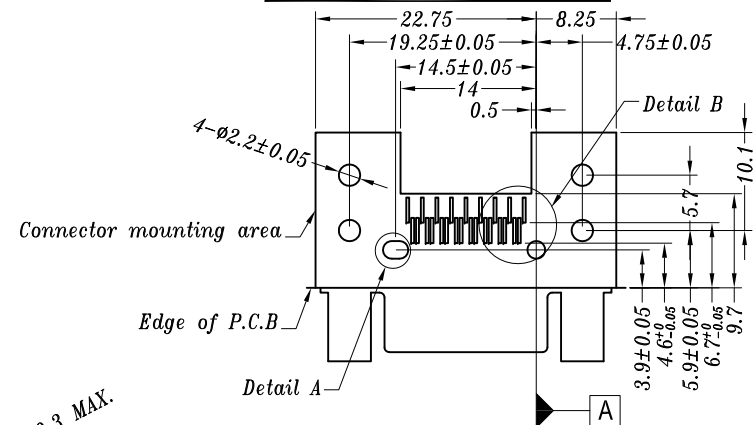

Detail A



Detail B

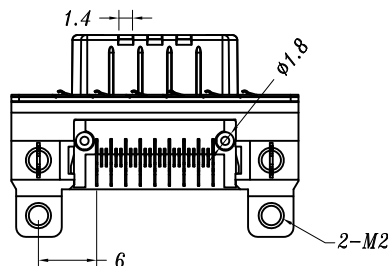

IFB-SWSPZ3-08-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. IFB-SWSPZ3-08

DWG NO. IFB-SWSPZ3-08

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司