
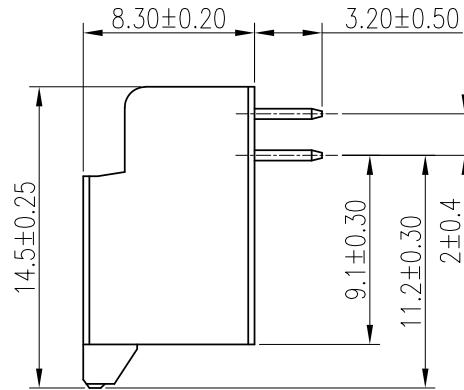


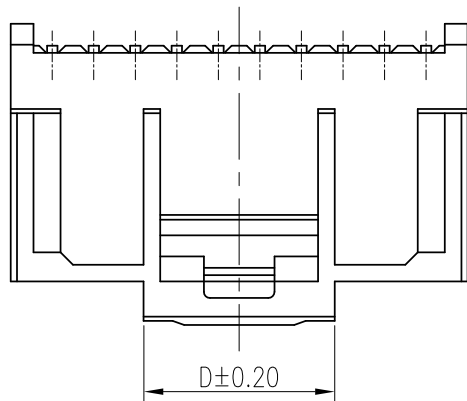

NOTE:



1. MATERIAL:

1.1. INSULATOR:LCP UL 94V-0

1.2. CONTACT=SQ 0.50mm BRASS

2. FINISH: TIN

3. RoHS & HF COMPLIANCE

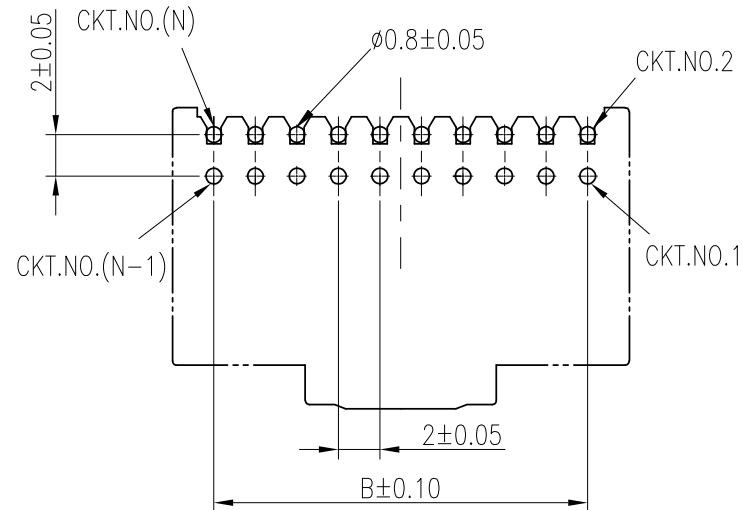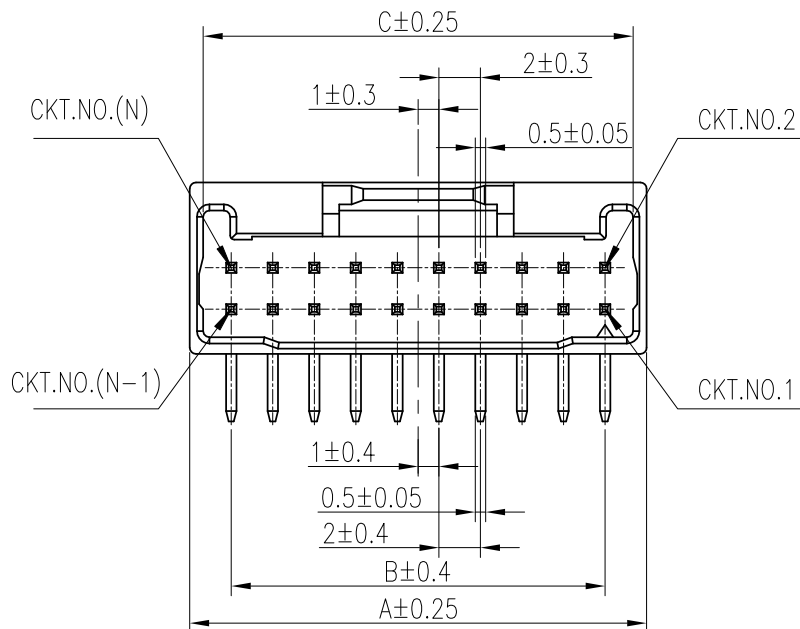

RECOMMENDED P.C.BOARD
HOLE DIMENSION (T=1.2~1.6)
(MOUNTING SIDE)

5. DIMENSIONAL

POS	A	B	C	D
40	42	38	40.7	9.2
38	40	36	38.7	9.2
36	38	34	36.7	9.2
34	36	32	34.7	9.2
32	34	30	32.7	9.2
30	32	28	30.7	9.2
28	30	26	28.7	9.2
26	28	24	26.7	9.2
24	26	22	24.7	9.2
22	24	20	22.7	9.2
20	22	18	20.7	9.2
18	20	16	18.7	9.2
16	18	14	16.7	9.2
14	16	12	14.7	9.2
12	14	10	12.7	9.2
10	12	8	10.7	7.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.50
.XX ± 0.35
.XXX ± 0.25
ANG ±

PPOJECTION


照片框

ORDER INFORMATION

IGD20-RXcc-xx-LF

SERIES
LEADFREE
10~40WAY
BK:BLACK
WH:WHITE
NON POST
DIP 90°

DESCRIPTION: IGRID 2.0MM W/B DUAL DIP PLUG ASSY RA

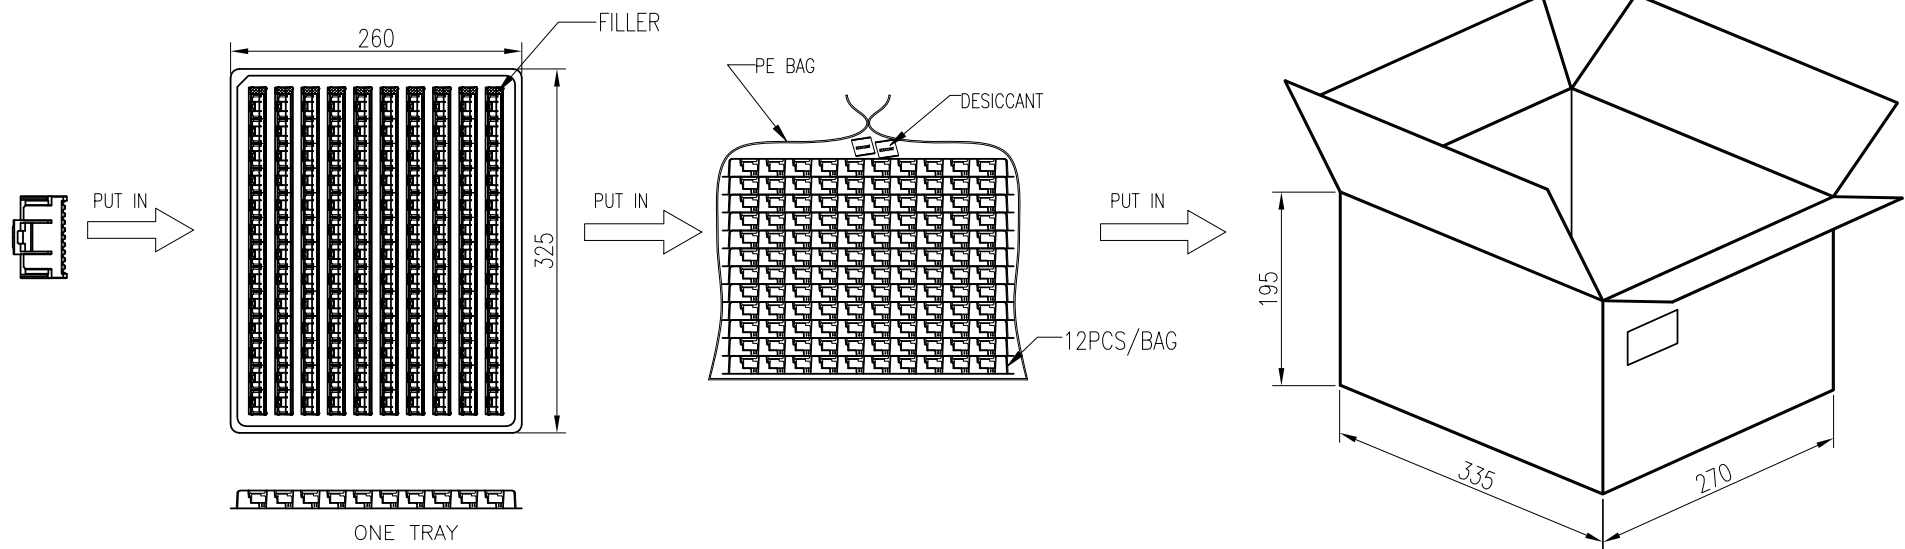

7.STANDARD PACKAGING QUANTITY

CKT. SIZE	PLASTIC TRAY (12 ROWS) QTY. IN ONE TRAY(pcs)	TRAYS NUMBER OF TRAYS	SHIPPING CARTON QUANTITY(pcs)
10	240	12	2880
12	200	12	2400
14	180	12	2160
16	160	12	1920
18	140	12	1680
20	130	12	1560
22	120	12	1440
24	110	12	1320
26	100	12	1200
28	90	12	1080
30	90	12	1080
32	80	12	960
34	80	12	960
36	70	12	840
38	70	12	840
40	60	12	720

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.50
.XX ± 0.35
.XXX ± 0.25
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

IGD20-RXcc-xx-LF

SERIES
LEADFREE
10~40WAY
BK:BLACK
WH:WHITE
NON POST
DIP 90°

DESCRIPTION: IGRID 2.0MM W/B DUAL DIP PLUG ASSY RA