




P2

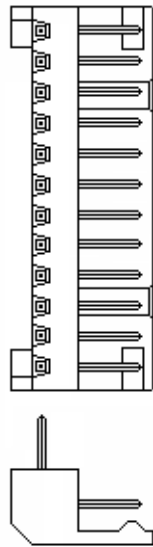

(WAFER-12P 90°DIP)

- 1 BLACK
- 2 BROWN
- 3 RED
- 4 ORANGE
- 5 YELLOW
- 6 GREEN
- 7 BLUE
- 8 PURPLE
- 9 GRAY
- 10 WHITE
- 11 BLACK
- 12 BROWN


P1

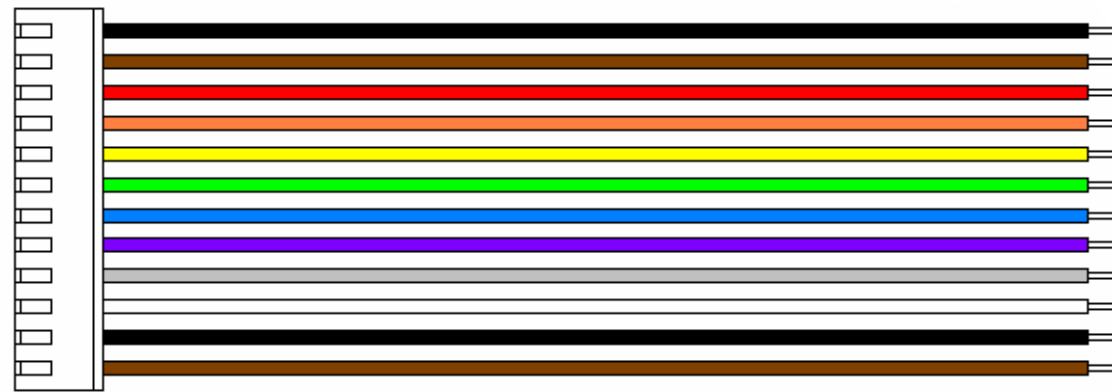

250mm±10mm

3mm±1mm

1. P1 : 2.5mm PITCH CRIMP TERMINAL AND HOUSING -12P
COLOR=BROWN
2. P2 : 2.5mm PITCH WAFER-12P 90°DIP TYPE CONTACT
TIN PLATED INSULATOR COLOR=BROWN
3. WIRE IS UL (1007) 24AWG 80°C 300V PVC JACKET

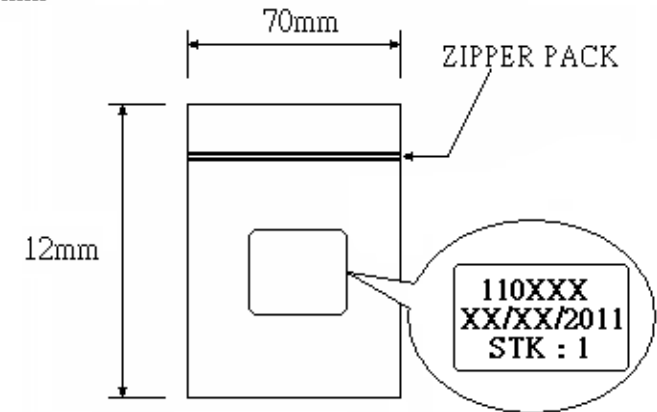

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

ILGX1-120024-FR25C-LF

SERIES

12 WAY

24 AWG

FEMALE+MALE DIP 90°

250mm

LEADFREE

DESCRIPTION: