



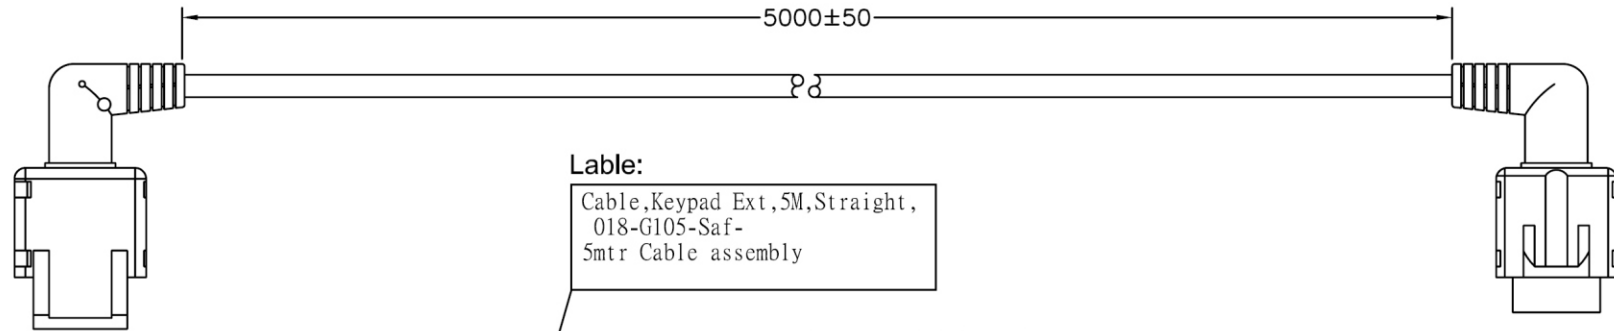




Lable:

Cable,Keypad Ext,5M,Straight,
018-G105-Saf-
5mtr Cable assembly


PE SCREW:



P.C.B SPECIFICATION:




FRONT VIEW



FRONT VIEW

SCREW:



PIN OUT			
P1		P2	
1	BROWN	1	TWISTED PAIR
2	BLUE	2	
3	RED	3	TWISTED PAIR
5	WHITE	5	
7	GREEN	7	TWISTED PAIR
8	PINK	8	
4	ORANGE	4	
6	YELLOW	6	
9	BLACK	9	
10	BRAID	10	

ITEM	PART NO.	DESCRIPTION	Q'TY
1	2214-10SG-122	2.54mm PCB SOCKET 10P	1
2	H02	H02 FAST INSULATION	1 SET
3	2316-10G-103	2.54mm BOX HEADER 10P	1
4	H04	H04 FAST INSULATION	1 SET
5	810B-3P3C2822B6.5BK	UL2725 28AWGX3P(7/0.127)+22AWGX3C(7/0.254)+ADB OD:6.5mm PVC BLACK WITHOUT POLISH	1
6	TUBE-H.S-1.0-BK	HEAT SHRINK TUBE OD:1.0 L=15MM COLOR:BLACK	1
7	PCB-17.5*11	THICKNESS 1.1 P.C.B L*W=17.5*11	1
8	PCB-14.5*8.0	THICKNESS 1.1 P.C.B L*W=14.5*8.0	1
9	SCREW	THUMB SCREW 5.3*9.65	4
10	MOLDING	70P PVC BLACK WITHOUT POLISH MOLDING	

ILWILW-E5M-1010-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. **ILWILW-E5M-1010**

DWG NO. **ILWILW-E5M-1010**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司