

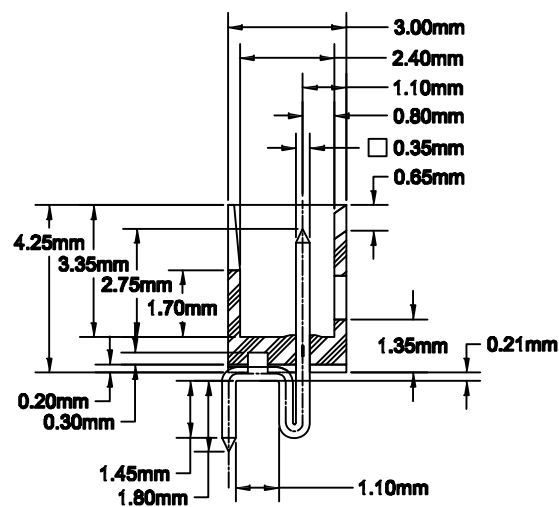
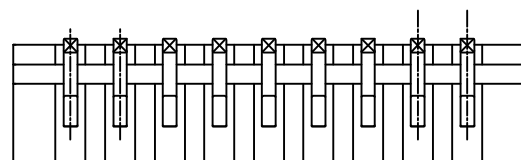
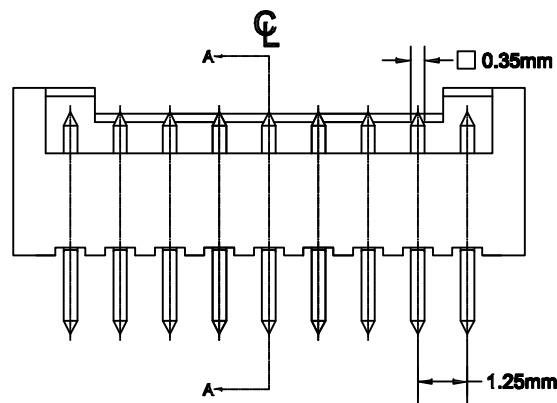
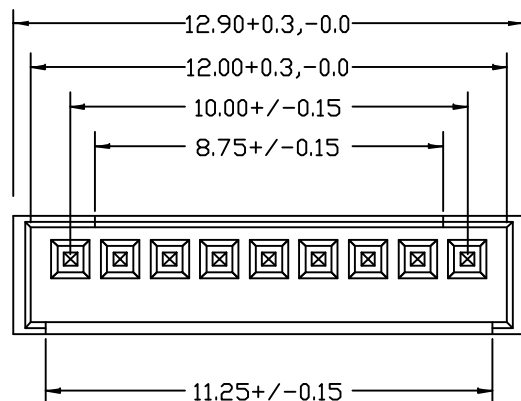


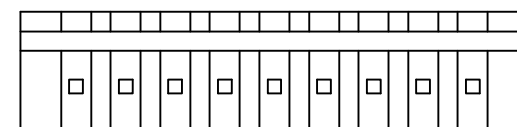

SECTION A-A

Copy of bottom
view w/o pins

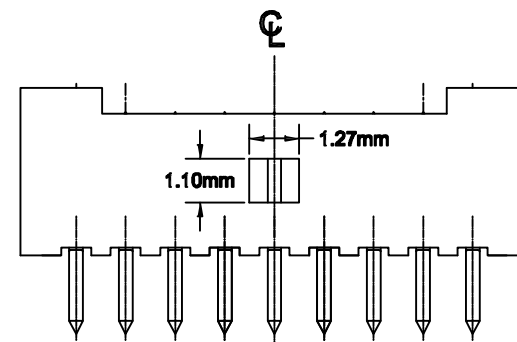

MATERIAL:

INSULATOR: GLASS-REINFORCED THERMOPLASTIC [NY-9T]

CONTACT: BRASS

PLATING: TIN PLATED OVER NICKEL

SPECIFICATION:

VOLTAGE RATING: 250 VAC RMS

CURRENT RATING: 1 AMP

DIELECTRIC WITHSTAND VOLTAGE: 500 VAC RMS 60 Hz FOR 1 MINUTE

INSULATION RESISTANCE: 100 MEGAOHMS MIN AT 500 VDC

CONTACT RESISTANCE: 20 MILLIOHMS MAX.

DURABILITY: 20 CYCLES

ENVIRONMENTAL:

TEMPERATURE RANGE: -40°C TO +70°C

SUBSTRATE CONTACT IS SOLDERABLE AT 235°C FOR 6 SEC.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ILZ-E11-09-LF
SERIES LEADFREE
09WAY
EDGE 1.1mm

DESCRIPTION: