


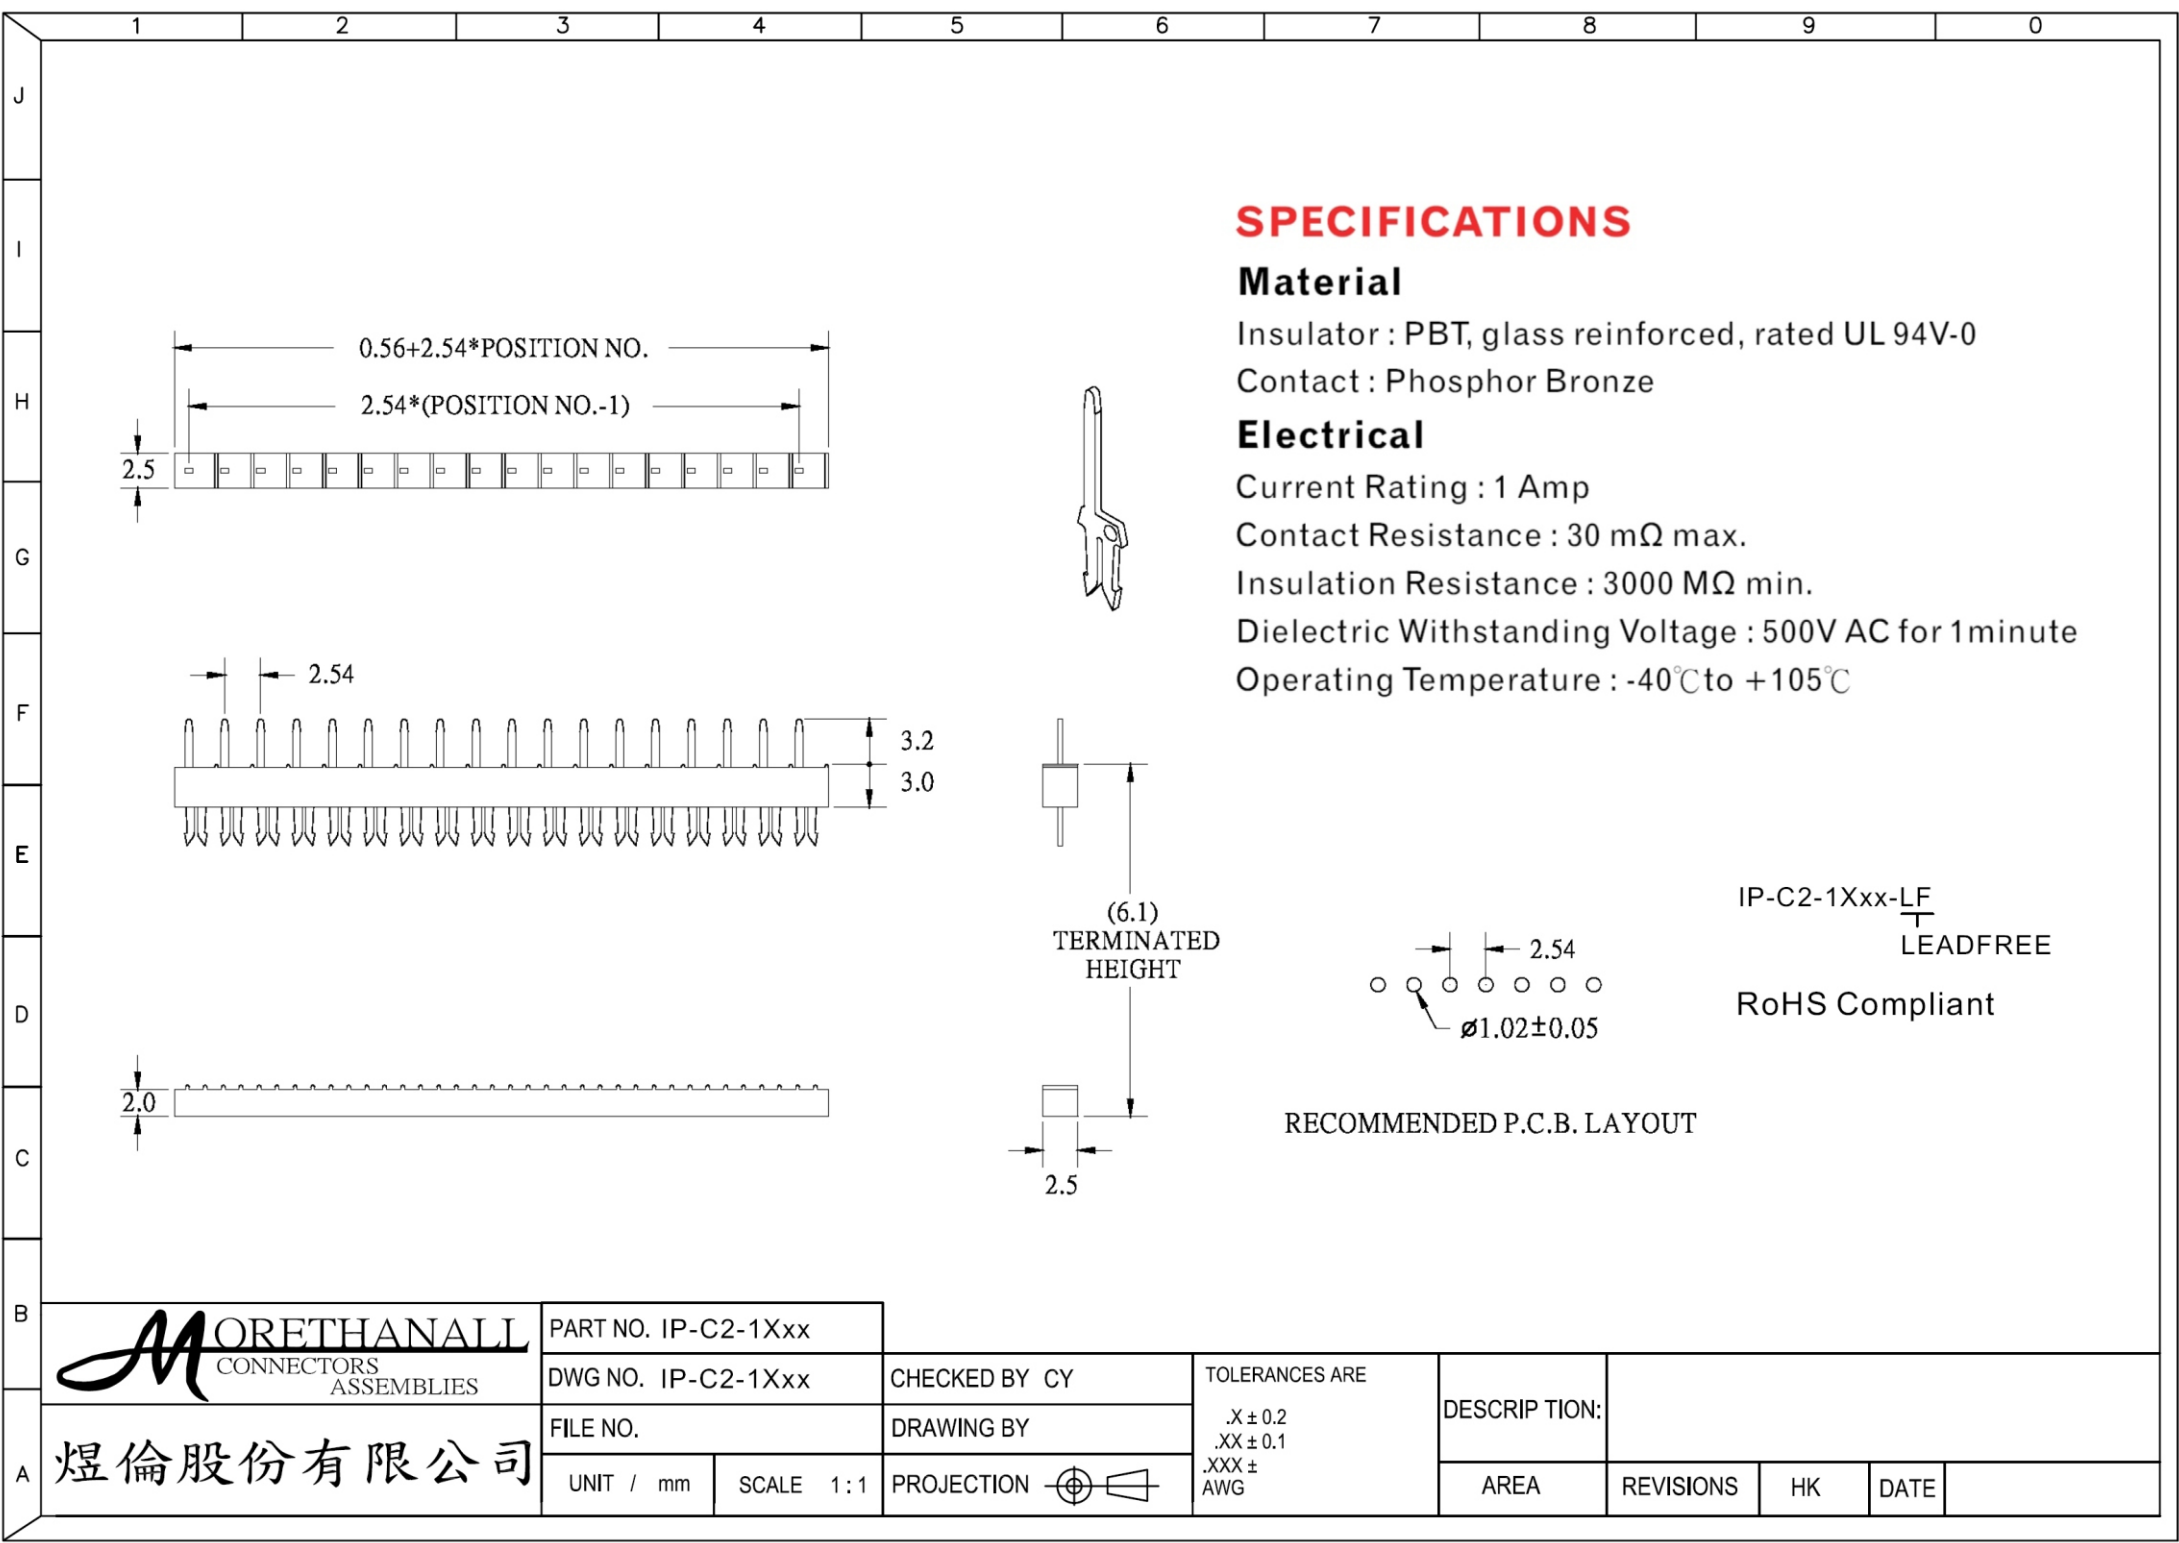

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

IP-C2-1Xxx-LF
LEADFREE

RoHS Compliant

RECOMMENDED P.C.B. LAYOUT

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. IP-C2-1Xxx									
DWG NO. IP-C2-1Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:					
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE		

煜倫股份有限公司