



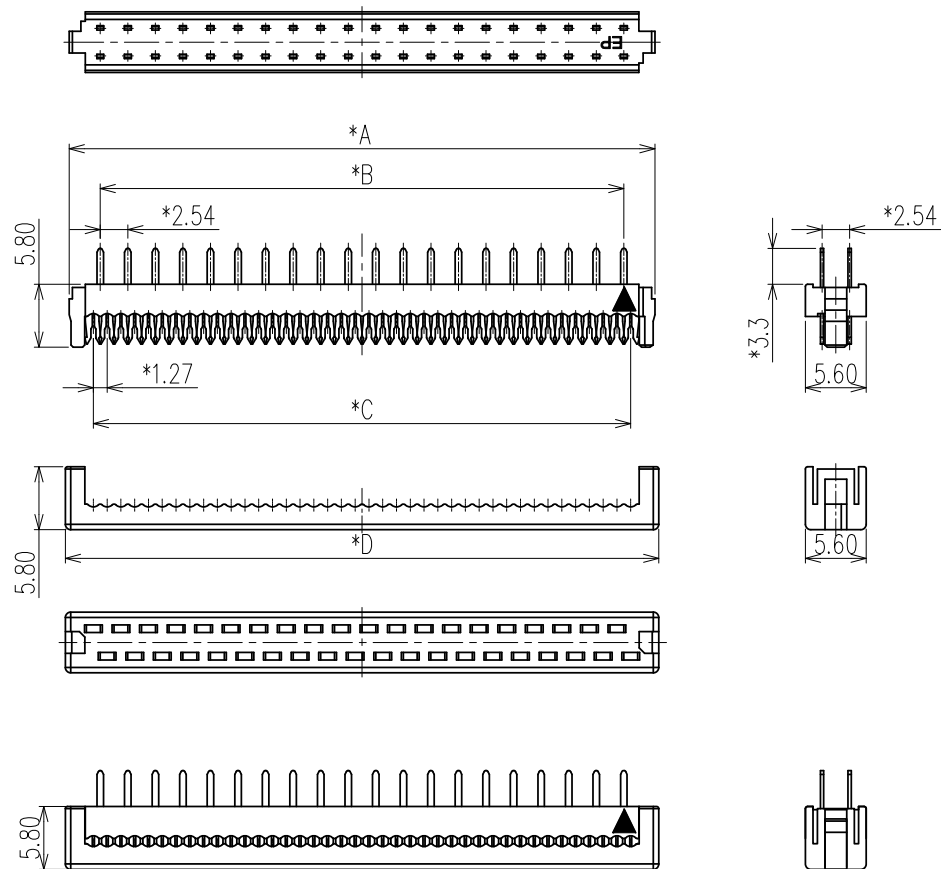

After Assembly (H: 5.80mm)



Recommended P.C.B Layout

Specifications:

Current Rating: 1.0 Amp

Contact resistance: 30m Ohm Max. at 6V DC 0.3A

Insulator resistance: 1000M ohm min. at 500V DC

Withstanding Voltage: 500V AC/Minute

Operating Temperature Range: -40°~+105°C

Wire Size Flat Cable I.D.C: 1.27mm Pitch

Material And Finish

Insulator: PBT&Glass-fiber reinforced UL94V-0

Insulator Color: Black

Contact: Phosphor Bronze or Brass

Contact Plating: See Contact Plating Tab.

Note: (*)Marked is Important DIM For QC.

No. of Positions

No.	A	B	C	D	No.	A	B	C	D	No.	A	B	C	D
6	10.82	5.08	6.35	11.52	16	23.52	17.78	19.05	24.22	34	46.38	40.64	41.91	47.08
8	13.36	7.62	8.89	14.06	20	28.60	22.86	24.13	29.30	40	54.00	48.26	49.53	54.70
10	15.90	10.16	11.43	16.60	24	33.68	27.94	29.21	34.38	50	66.70	60.96	62.23	67.40
12	18.44	12.70	13.97	19.14	26	36.22	30.48	31.75	36.92	60	79.40	73.66	74.93	80.10
14	20.98	15.24	16.51	21.68	30	41.30	35.56	36.83	42.00	64	84.48	78.74	80.01	85.18

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

IP01-C2-xx-LF
SERIES | LEADFREE
06~64WAY
TWO TYPE

DESCRIPTION: 2.54mm Pitch IDC DIP Plug