
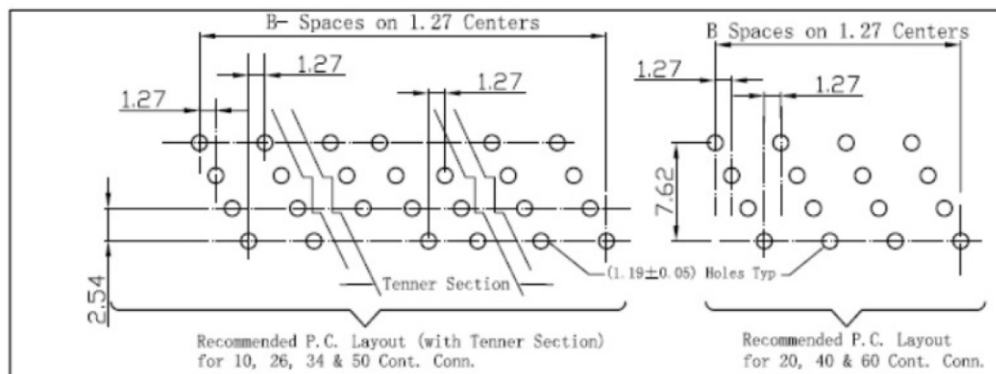
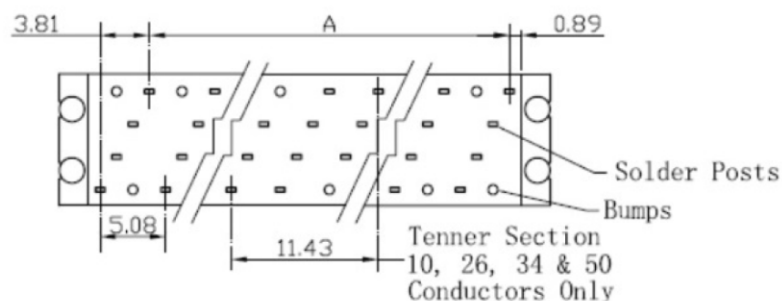


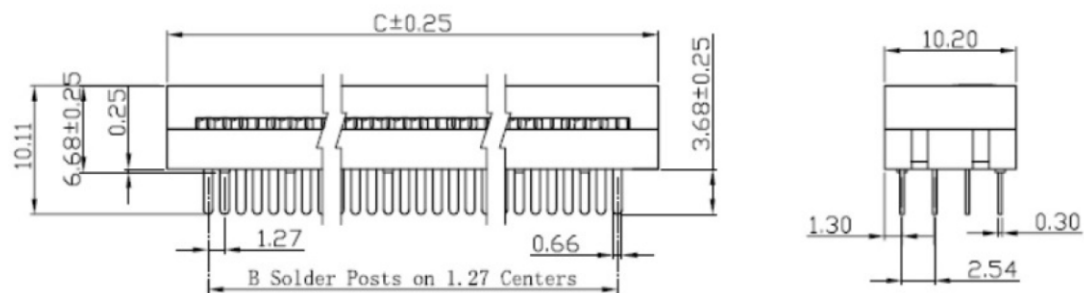

■ Specifications:

- Current rating: 1A AC/DC
- Withstanding voltage: 500V AC/minute
- Temperature range: 120° C
- Wire range: 28AWG 7/0.12 OD:0.9mm
- Plastic material: PBT UL 94V-0
- Terminal material: Phosphor Bronze
- Finish: Tin-Plated

Poles	Dimensions		
	A	B	C
10	—	11.43	17.78
20	20.32	24.13	30.48
26	27.94	31.75	38.10
34	38.10	41.91	48.26
40	45.72	49.53	55.88
50	58.42	62.23	68.58
60	71.12	74.93	81.28

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

IP40-C2-xx-LF
SERIES | LEADFREE
10~60WAY
TWO TYPE

DESCRIPTION: 2.54mm*7.62mm widened four-row DIP IDC