


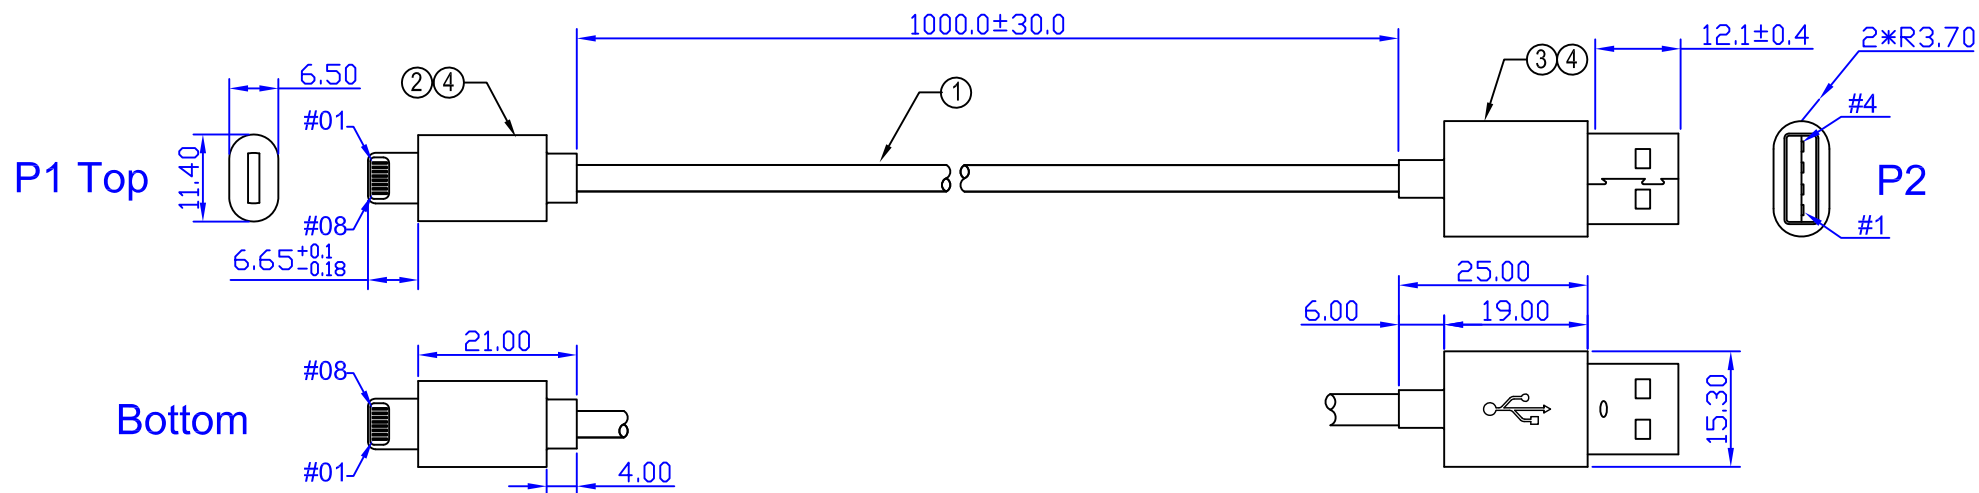

Electrical Properties:

1. It shall be not have any open/short, miswiring and intermittent failures .
2. The cable shall be 100% electrical test .
3. Voltage test: DC 300V; Insulation resistance: 5.0M ohm/Min;
Conductance resistance: 5.0 ohm/Max;

Machinery Character:

1. ALL dimension are "mm" except specified.
2. The cable should be clean, free of oiled/flash/burred .
3. Cable Ass'y shall be RoHS Compliant .

PIN OUT

P1	P2	Color
03(Top)+03(Bottom)	1	Red
02(Top)+02(Bottom)	2	White
01(Top)+08(Bottom)	3	Green
S	4	D.W
S	S	D.W+Braid

4	TPE: 45P PVC, Color: White/WH11-A.	G	4
3	P2 Conn: USB A Male ,Pin G/F.	PCS	1
2	P1 Conn: 8Pin Lightning Male.	PCS	1
1	Cable: No-UL 30AWG(19/0.05TC+250D)*1P+24AWG(26/0.10TC+250D)*1C+AL/MY +D.W(19/0.05TC+250D)*3C+Braid,OD=2.6±0.15mm ,Jacket TPE, Color: White.	MM	
Item	DESCRIPTION	UNIT	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

IP5UB-084A2430MFI-M1M

SERIES

MALE TO MALE

1000mm

MFI

24+30 AWG

4 PIN A TYPE

8 PIN

DESCRIPTION: iPod Cable