

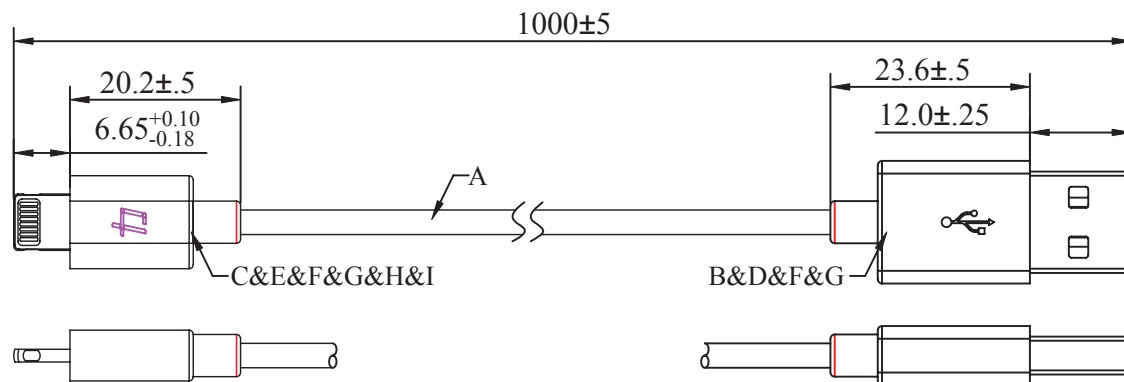



P1

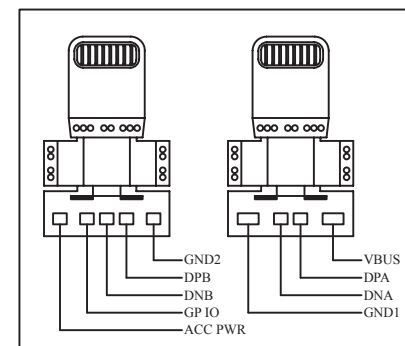


P2



Wire Sketch map

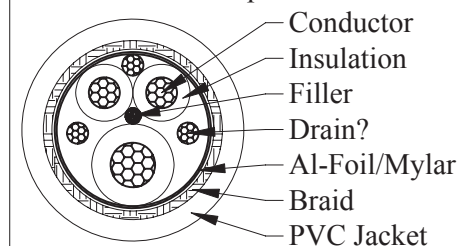

Wiring Table

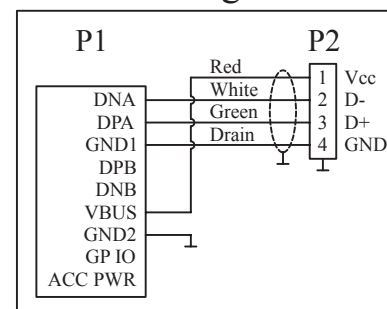

Product information			
Pink(1915U)	01	Red(205C)	07
White	02	Blue(2985C)	08
Baby Green(7480U)	03	Yellow(387C)	09
Baby Blue(7466U)	04		
Black	05		
Gold(124U)	06		

I	5287120000000	Catalyst 712	Clarity	0.020g
H	5524031100000	Glue 403	Clarity	0.015g
G	5010101000021	Heat-shrink Tube Φ(1.0)XL(4.0)mm Black	Black	8mm
F	----	Outer Molding PVC 50P 94V-0	--	15.5g
E	7299020000007	Inner Molding PP Clarity	Clarity	2.5g
D	7049020000007	Inner Molding PE Clarity	Clarity	1.5g
C	2S88C10B0000N	MFI C10B Connector	--	1SET
B	200181630907J	USB A/M Soldered Type Insulator White PBT Gold Plated Terminal 30μ Shell Gold Plated	White	1SET
A	----	Non-UL 32AWG(7/0.08)X2C+24AWG(44/0.08)X1C+3D(16/0.08)+3D(250D Nylon)+AB(97%) OD=2.80±.10mm Jacket PVC VW-1	--	980mm
No.	P/N.	Specification	Color	Q'ty

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4


PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ±

照片框

ORDER INFORMATION

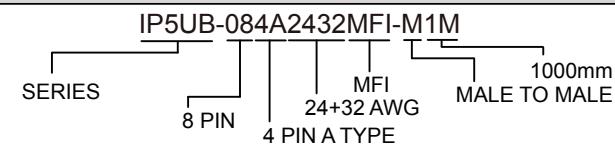

DESCRIPTION: USB A Male To C10B Connector Cable 1.0M