
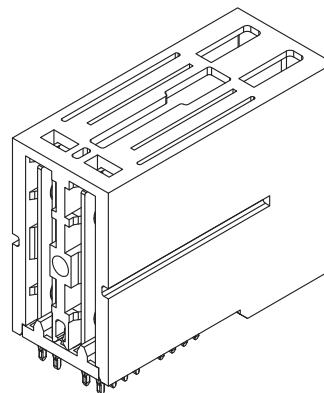


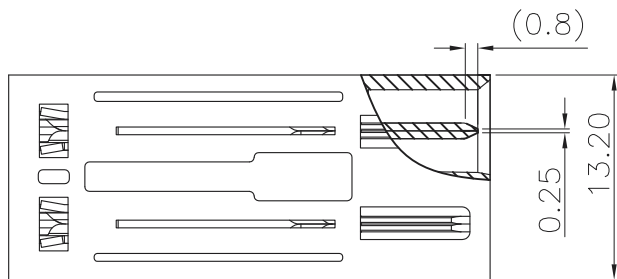

Material and Plating:

Housing: LCP, UL94V-0 , Black.

Cover: LCP, UL94V-0 , Black.

Contacts: High Conductivity Copper.

30u"Au+Pd/Ni on Contact Area and 80u" Min Matte Tin
Plated on Press Fit over nickel 50u" Min .

Electrical Characteristics:

Current Rating: 35 AMP(2oz*2) or 45AMP(2oz*4).



Dielectric Withstanding Voltage: AC 1500V For 1 minute.

Insulator Resistance: 1500MΩ min. at DC 500V.

Contact Resistance: 0.5mΩ max.

Operating Temperature: -55°C~+125°C.

***RoHS Compliant**

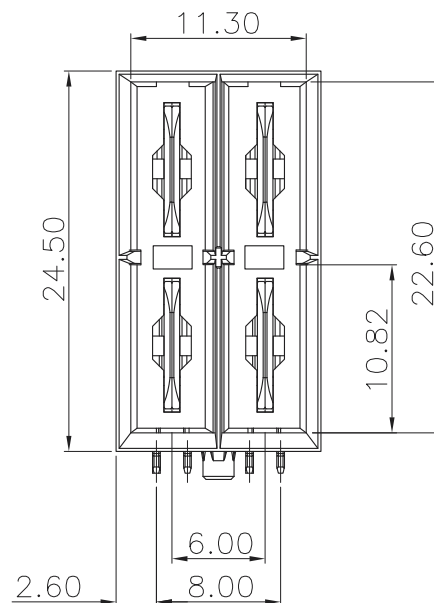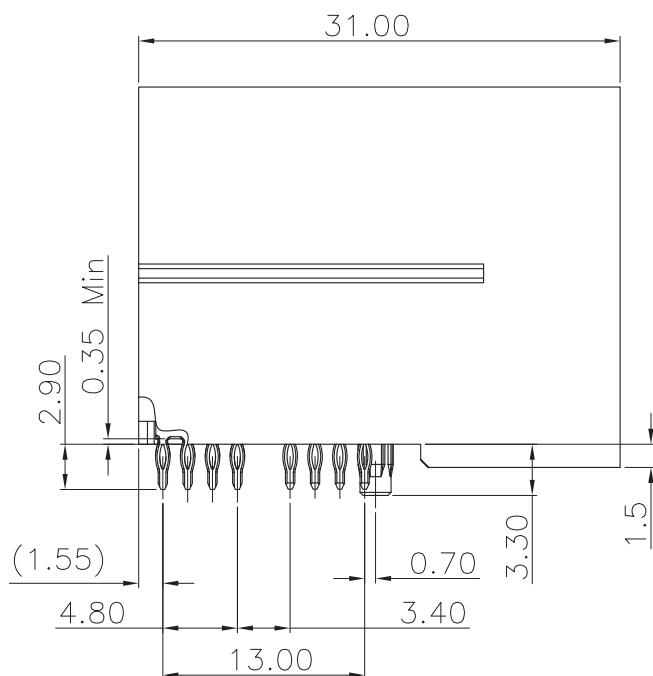

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

IP60-PQP13-0401-LF

SERIES

LEADFREE

04X1 WAY

WIDTH 13.20mm

POST

PRESS FIT



MALE

DESCRIPTION: Male power connector

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

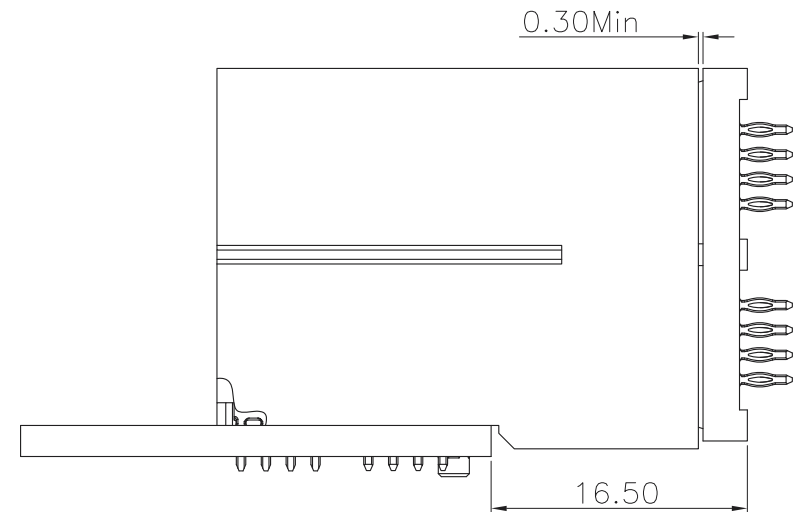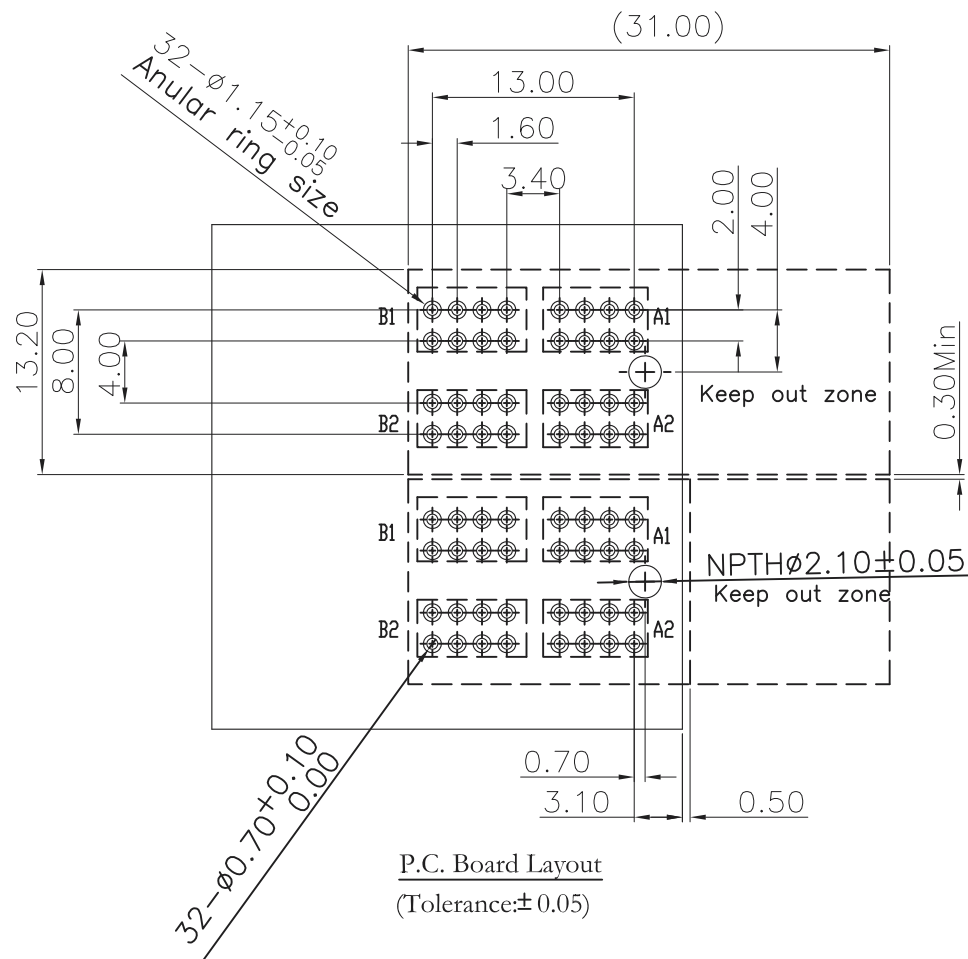

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

IP60-PQP13-0401-LF
SERIES
LEADFREE
04X1 WAY
WIDTH 13.20mm
POST
PRESS FIT
MALE

DESCRIPTION: Male power connector