
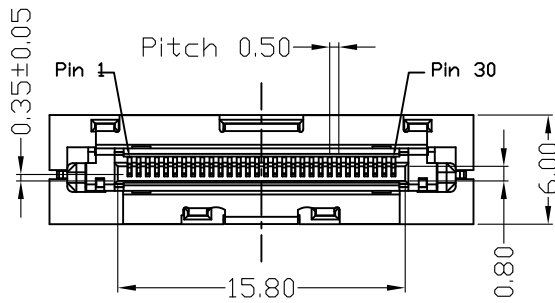

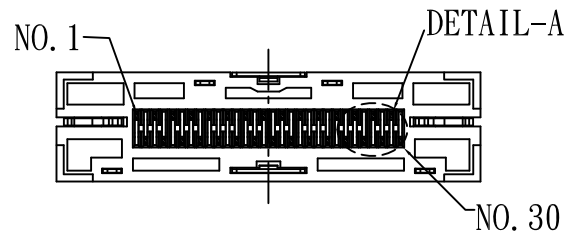
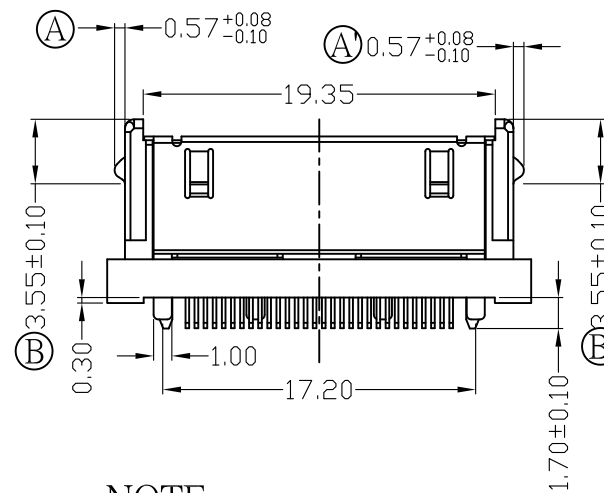
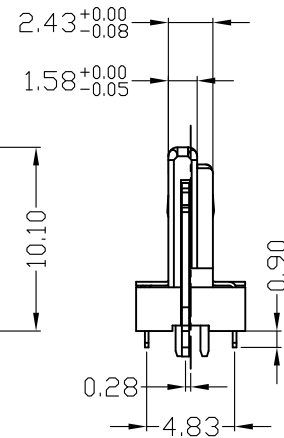


NO.	NAME	MATERIAL	CLOR	QTY
1	HOUSING	SEE NOTE:3.	SEE NOTE:3.	1PCS
2	SHIELD	SUS301		1PCS
3	LATCH			2PCS
4	I-Pod-30Pin 母座 TERMINAL-R	C5210		15PCS
5	I-Pod-30Pin 母座 TERMINAL-L			15PCS

PA46無鹵 黑色
C5210 Ni Min50u"/Sn Min100u"/Au1-3U";
卡勾SUS301, Ni Min50u"/鐵殼SUS301;

NOTE:

- ELECTRICAL
CURRENT RATING:0.5A
DIELECTRIC WITHSTANDING VOLTAGE:300VAC
INSULATION RESISTANCE:100MΩ /1000VDC
CONTACT RESISTANCE:80mΩ
- ENVIRONMENTAL
OPERATING TEMPERATURE:-15°C TO 85°C
STORAGE TEMPERATURE:-30°C TO 85°C

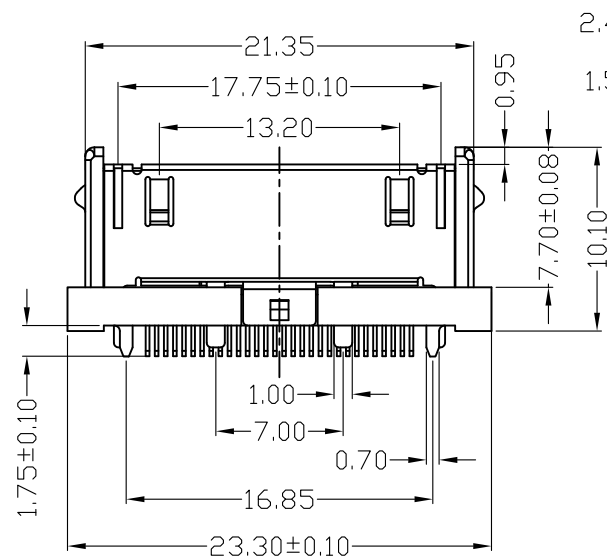

NOTE:
|A-A'|≤0.08
|B-B'|≤0.08

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.40
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION



ORDER INFORMATION

IPD-PD-30-LF
SERIES | LEADFREE
30 WAY
DIP 180°
PLUG

DESCRIPTION: