



DETAIL A SCALE 5:1

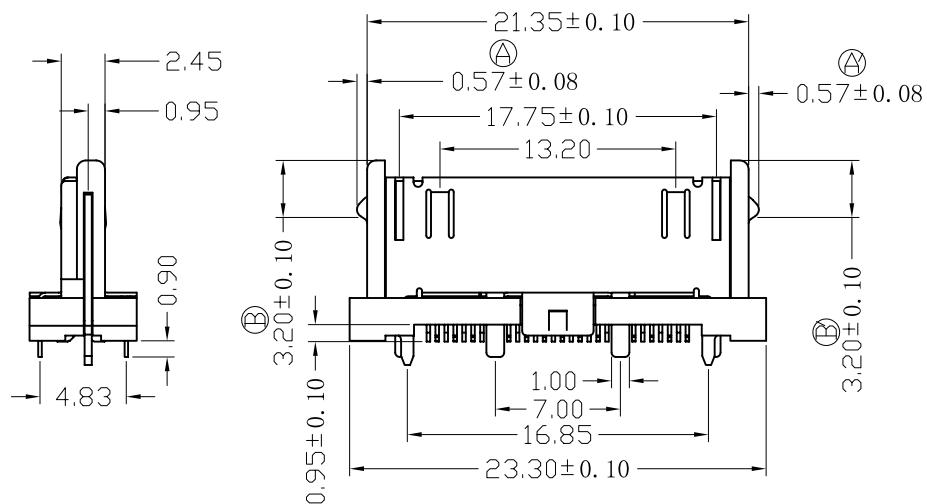

NOTE:

- ELECTRICAL
CURRENT RATING:0.5A
DIELECTRIC WITHSTANDING VOLTAGE:300VAC
INSULATION RESISTANCE:100MΩ /1000VDC
CONTACT RESISTANCE:80mΩ
- ENVIRONMENTAL
OPERATING TEMPERATURE:-15°C TO 85°C
STORAGE TEMPERATURE:-30°C TO 85°C

NO.	PART NO.	NAME	MATERIAL	COLOR	QTY
1		HOUSING	SEE NOTE:3.	SEE NOTE:3.	1PCS
2		SHIELD			1PCS
3		LATCH			2PCS
4		I-Pod-30Pin 仿原座充 TERMINAL-R			15PCS
5		I-Pod-30Pin 仿原座充 TERMINAL-L			15PCS

IPD-PV-30-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. **IPD-PV-30**

DWG NO. **IPD-PV-30**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X±0.2

.XX±

.XXX±

AWG

DESCRIPTION:

30Pin座充(直立貼板式)

AREA

REVISIONS

HK

DATE