
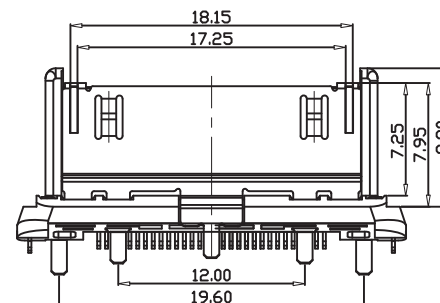

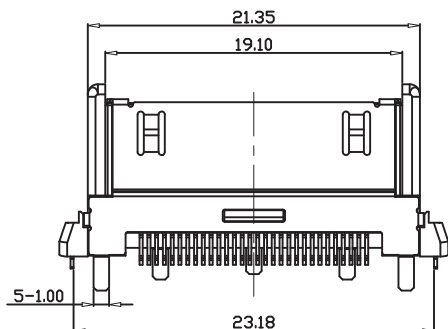
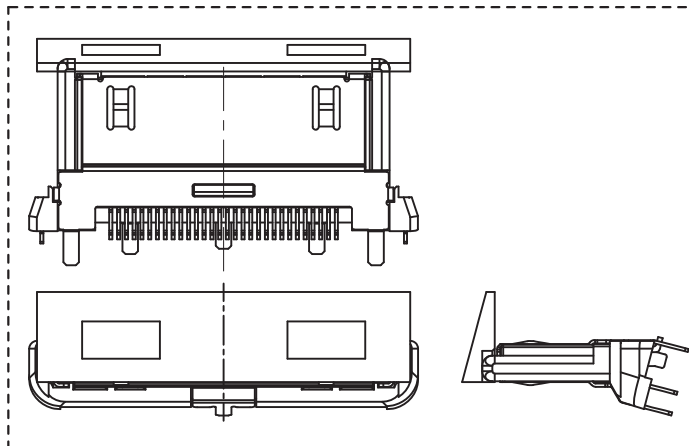
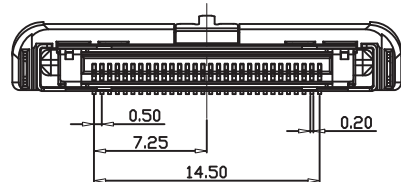


ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	I/O CONNECTOR	1	HOUSING:SYNTHETIC RESIN	(Gray)
			SHELL:STAINLESS	Nickel:30u"
			CONTACT1:COPPER ALLOY	Gold flash_selective
			CONTACT1:COPPER ALLOY	Nickel:50u",100u" Tin Min
			BACK COVER:SYNTHETIC RESIN	(Gray)
2	COVER TAPE	1	POLYSTYRENES	(COLOR:TRANSPARENT)
3	REEL	1	POLYSTYRENES	(COLOR:TRANSPARENT)
4	CARRIER TAPE	1	POLYSTYRENES	300PCS/CARRIER
5	WATERPROOF BAG	1	POLYETHYLENE	-
6	LABEL	-	-	-
7	BOX	1	CORRUGATED (DOUBLE WALL)	7 PCS CARRIER/BOX

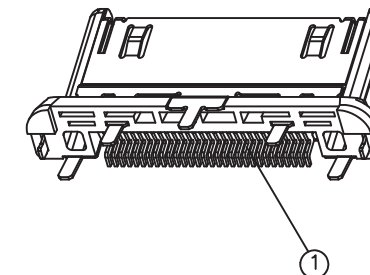

SPECIFICATION
MATERIAL
See drawing
STANDARD DATA
Rating current:1.0A
ELECTRICAL
Insulator resistance: 1000M ohms Min. @ 250 VDC
Withstanding voltage: 100 VAC / minute
Contact resistance: 50 m ohms Max.
MECHANICAL
Mating force: 30N(3.06kgf) Max.
Unmating force (Without lock): 4.2N(0.43kgf) Min.
Durability: 10000 cycles Min.
Contact retention force: 4.2N(0.43kgf) Min

IPD-PVACR-30-LF
LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. IPD-PVACR-30

DWG NO. IPD-PVACR-30

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±
ANG

DESCRIPTION:


PLUG IN CONNECTOR
SMT type-30 position

AREA

REVISIONS

DATE

煜倫股份有限公司

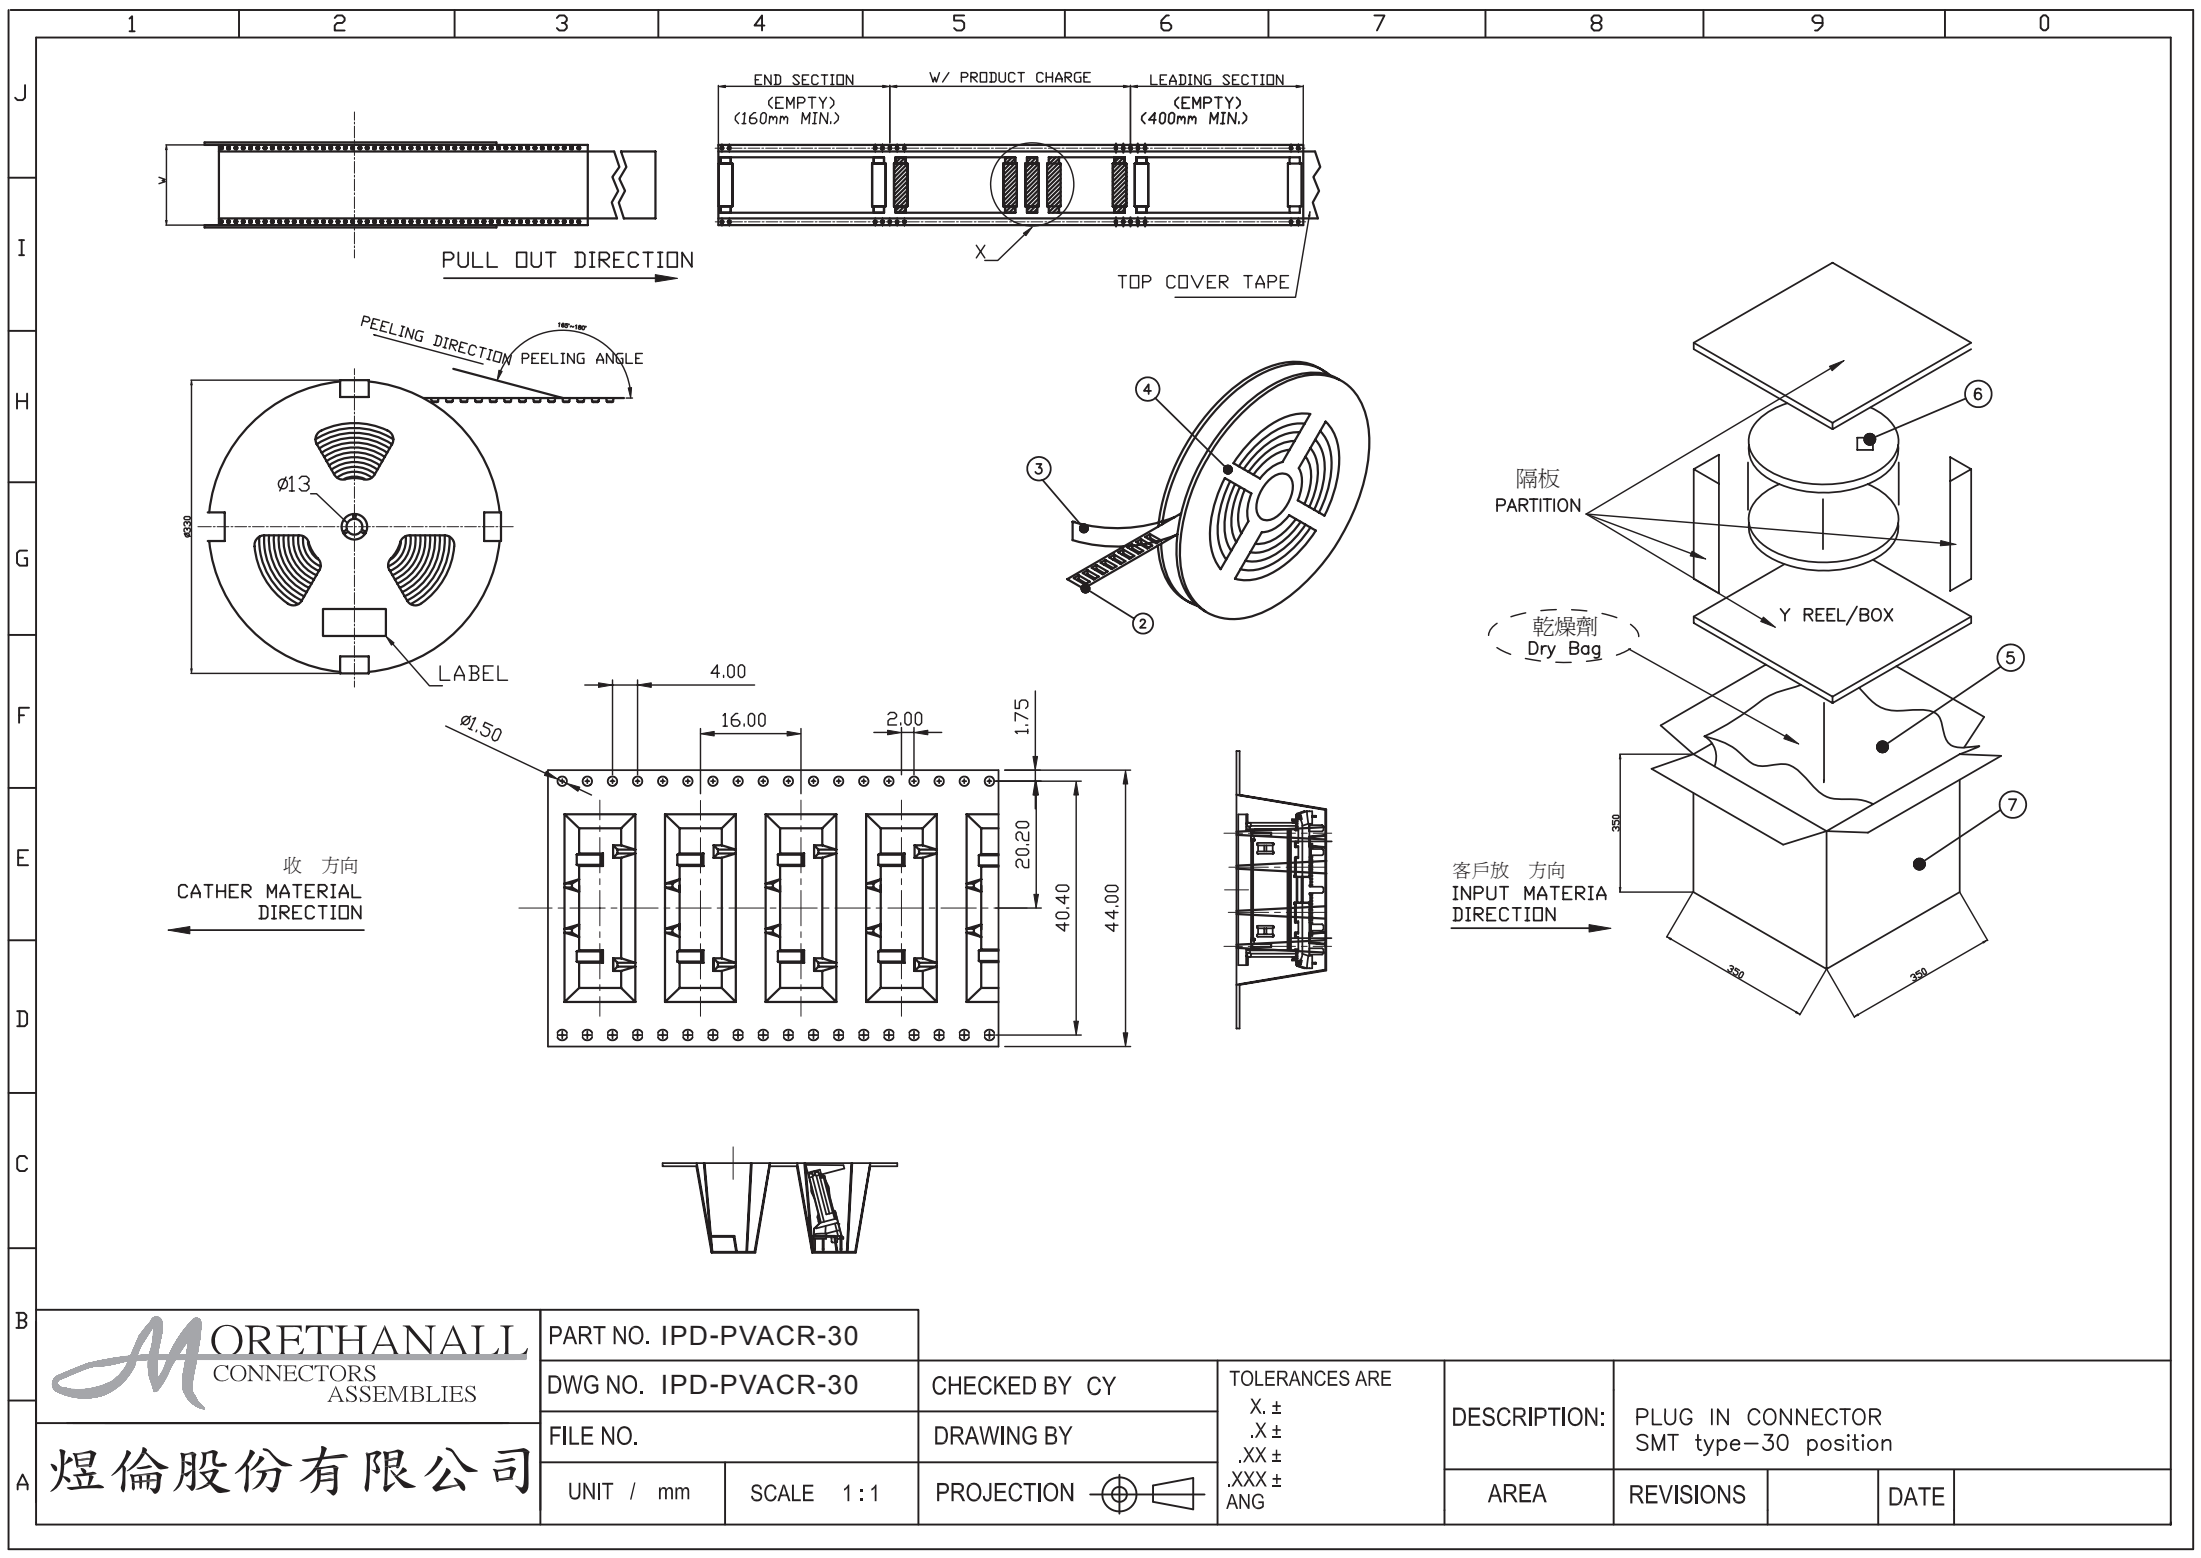

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. IPD-PVACR-30									
DWG NO. IPD-PVACR-30		CHECKED BY	CY	TOLERANCES ARE X. ± .X ± .XX ± .XXX ± ANG	DESCRIPTION:	PLUG IN CONNECTOR SMT type-30 position			
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1:1	PROJECTION			AREA	REVISIONS		DATE	