


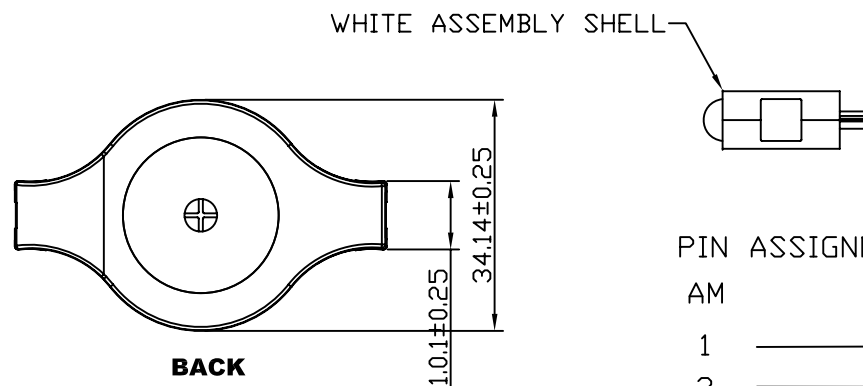

1.OPEN/SHORT/INTERMITT:100%.
2.INSULATION RESISTANCE:5MΩ
3.CONTACT RESISTANCE:10Ω.
4.HI-POT:300V 10MS

NO.	DESCRIPTION	Q'TY
1	CABLE:28AWG<30/0.08>*2C+32AWG<11/0.05>*1P OD:1.2*3.2mm JACKET COLOR:IPOD WHITE	1
2	USB A TYPE MALE SHELL PLATED:NICKEL CONTACT:GOLD FLASH	1
3	IPOD 30PIN IPOD WHITE IN COLOR	1
4	55P PVC IPOD WHITE IN COLOR	
5	RETRACTABLE MADE OF ABS IPOD WHITE IN COLOR(Pushbutton)	1

1	_____	8
2	_____	6
3	_____	4
4	_____	15

IPDUB-304ART-M1M2-LF
LEADFREE



MORETHANALL
CONNECTORS
ASSEMBLIES

PROJECTION 

	.X ± 0.2
	.XX ±
	.XXX ±
	AWG

DATE _____

煜倫股份有限公司