

SPECIFICATION

Rating: 0.3A 5V DC.

Circuit: SPDT.

Timing: Non shorting.

Travel: 2mm.

Operating force: 200±100g.



Tolerance: .XX=±0.2mm, .X=±0.3mm

IS-1260X-X-X


MODEL NO.	L
■	2
A	4
B	3

MODEL NO.	H
1	1.5
2	2.0



KNOB COLOR	
B	Black
W	White

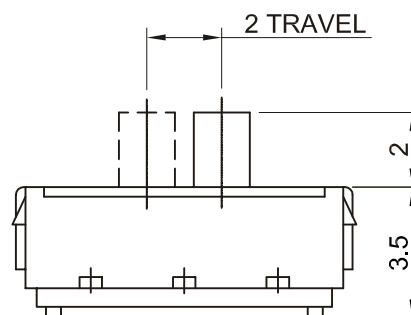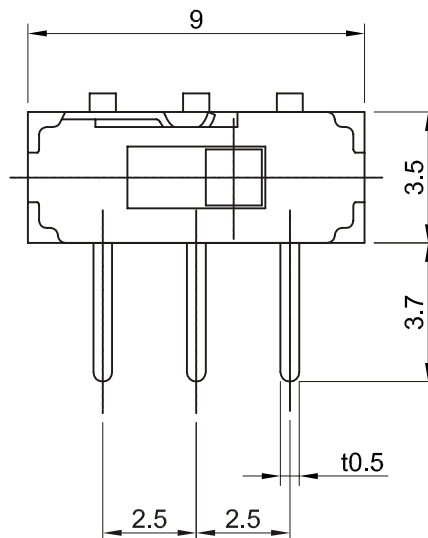

P.C.B LAND PATTERN



CIRCUIT DIAGRAM

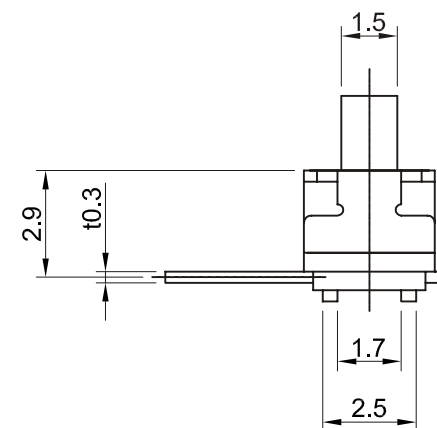

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. **IS-1260-1-B**

DWG NO. **IS-1260-1-B**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ±
.XX ±
.XXX ±
AWG

DESCRIPTION:

SLIDE SWITCH

AREA

REVISIONS

HK

DATE