


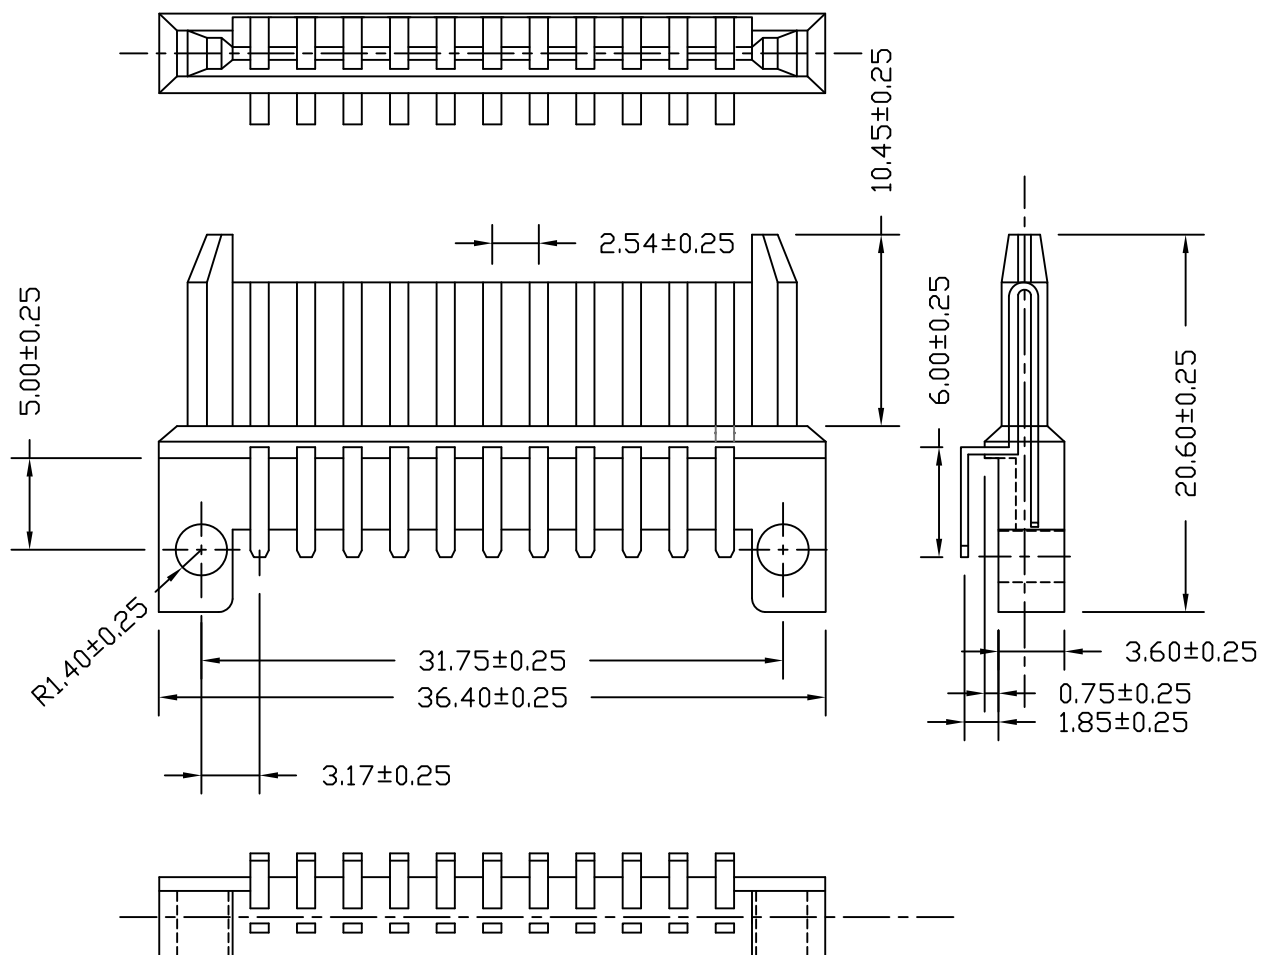

Male connector in 11, 25 or 33 way version
 Flat solder tag
 Extremely high mating cycles
 (– 6000)
 Coding upon request
 Standardised to the requirements of DIN 41620, IEC 130–11

PLATING: MATING AREA– 30u" GOLD 100u" NICKEL.
 SOLDER AREA– 100–150u" TIN 100u" NICKEL.

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

10–30 ±0.3

100–300 ±0.5

ANGULAR ±0.5°

PPOJECTION

照片框

ORDER INFORMATION

ISEP-PWX30-11-LF
 SERIES 11 WAY LEADFREE
 30u" GOLD
 NON POST
 90°SMT
 MALE

DESCRIPTION: