


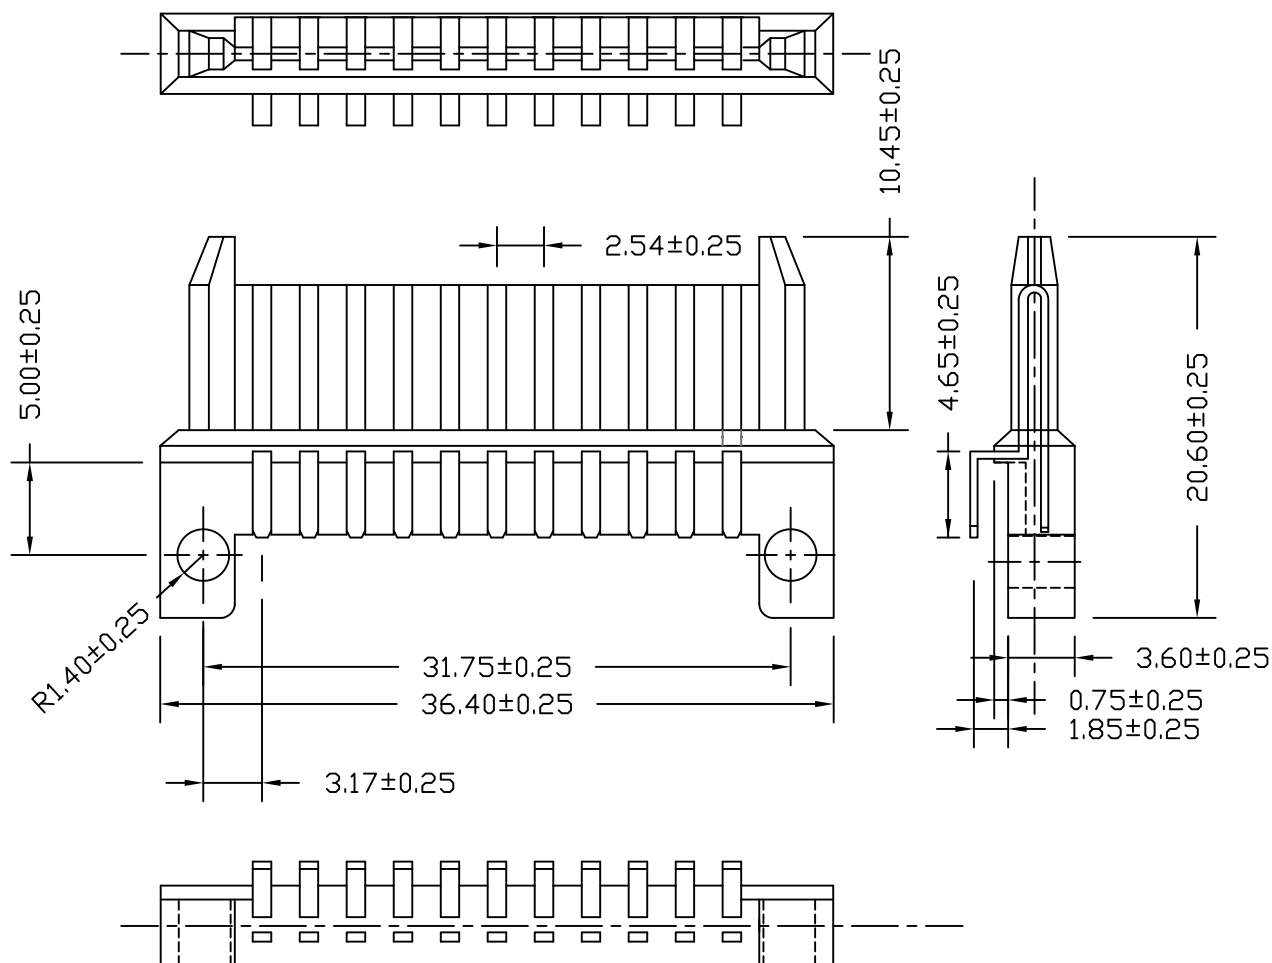

Male connector in 11 way version
 Flat solder tag
 Extremely high mating cycles
 (– 6000)
 Coding upon request
 Standardised to the
 requirements of DIN 41620,
 IEC 130-11

PLATING: MATING AREA– 32u" GOLD 100u" NICKEL.
 SOLDER AREA– 100-150u" TIN 100u" NICKEL.

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


TOLERANCES ARE

10-30 ±0.3

100-300 ±0.5

ANGULAR ±0.5°

PPOJECTION



ORDER INFORMATION

ISEP-PWX30-11T4-LF
 SERIES | | | | LEADFREE
 | | | | TIN 4.65mm
 | | | | 11 WAY
 | | | | 30u"GOLD
 MALE | NON POST
 90°SMT

DESCRIPTION: