




Male connector in 11, 25 or
33 way version
Flat solder tag
Extremely high mating cycles
(_ 6000)
Coding upon request
Standardised to the
requirements of DIN 41620,
IEC 130-11

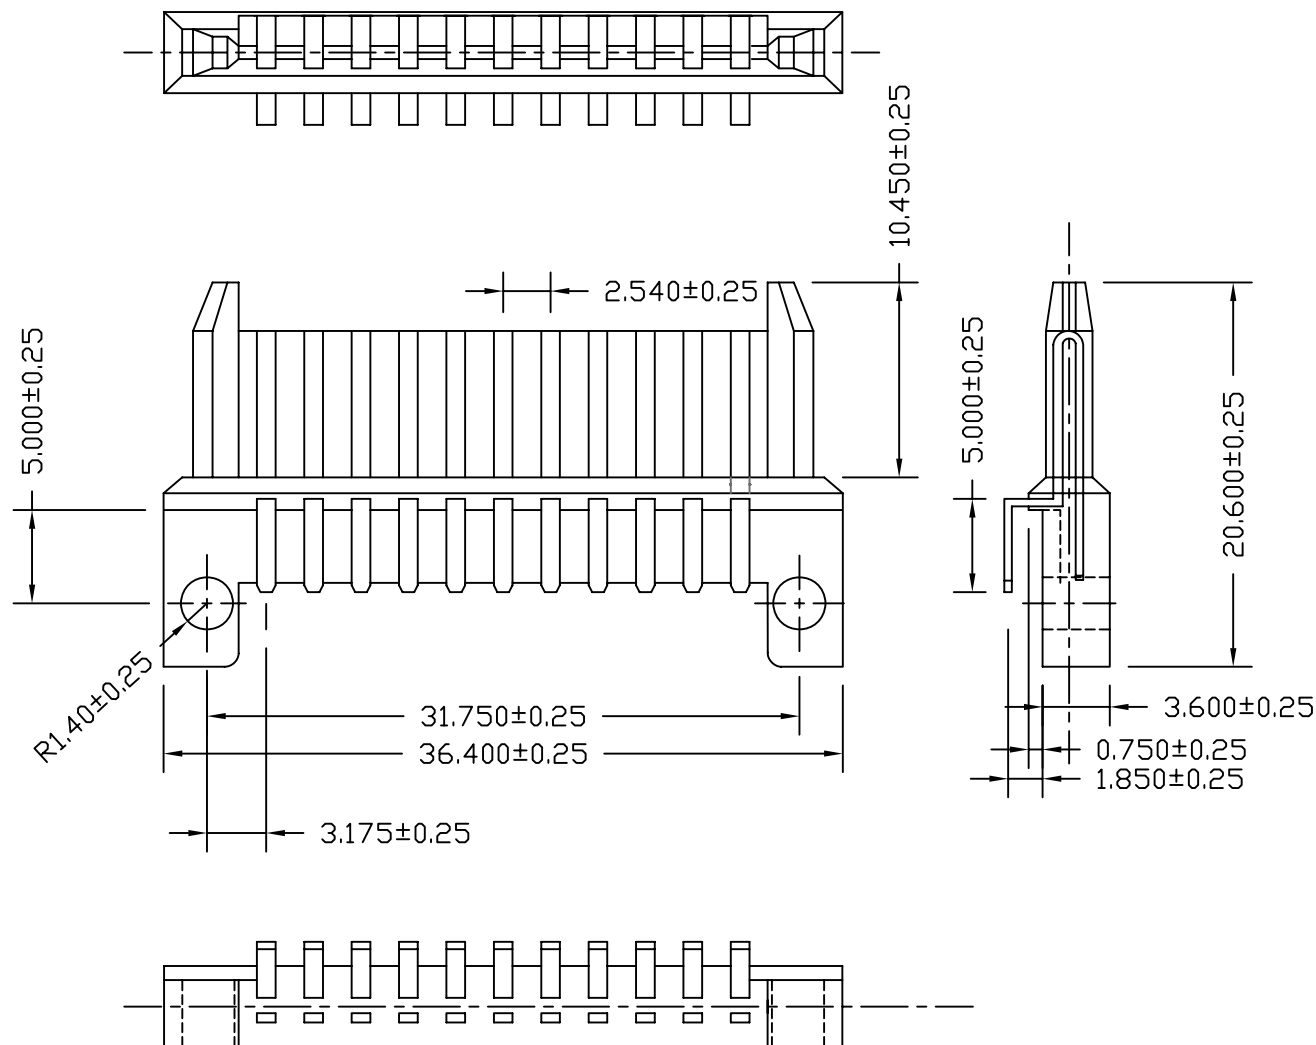

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ISEP-PWX30-11T5-LF
SERIES
MALE
NON POST
90°SMT
LEADFREE
TIN 5.00mm
11 WAY
30u" GOLD

DESCRIPTION: