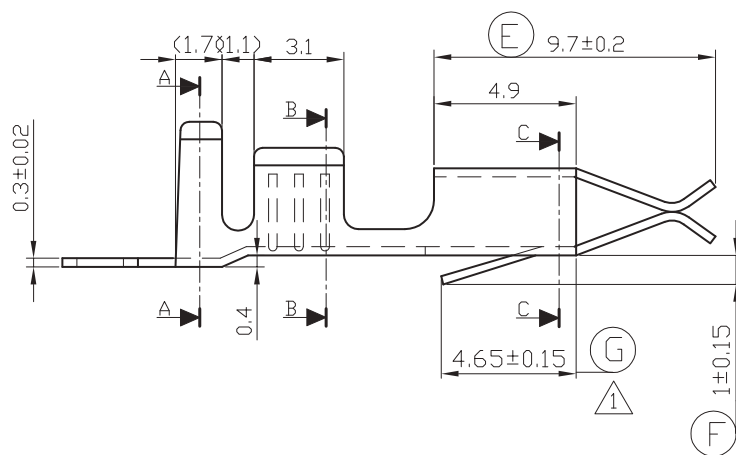
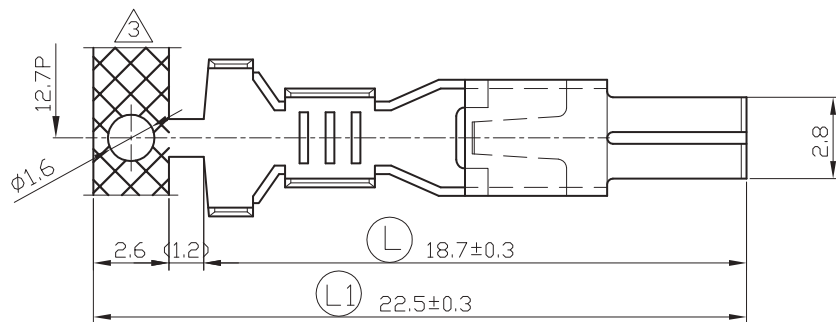


說明:

1.預鍍錫膜厚40u"以上

2.對手件: TAB=0.8

插入力:1.2kgf以下

拉拔力:0.2~0.5kgf

NOTE:

1.Tre-Tin Plated Thickness More Than 40u".

2.Mating Part:Tab=0.8

Inserted Force: Less Than 1.2kgf.

Tensile Force: 0.2~0.5kgf

1	Phosphor Bronze	Note 1	1.25~2.0mm ²
NO.	材料 Material	表面處理 Surface Treatment	線徑 Wire Range

材料 MATERIAL	SEE TABLE
表面處理 FINISH	SEE NOTE

RoHS Compliant

TOLERANCES ARE

<1.0 : ± 0.10

1.0~5.0 : ± 0.15

5.0~10.0 : ± 0.20

10.0~20.0 : ± 0.25

20.0~45.0 : ± 0.30

>45.0 : ± 0.50

ANGLE : ± 2.0°

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

ISO-FT-16-LF
SERIES T LEADFREE
16 AWG
TERMINAL
FEMALE

DESCRIPTION: Terminals for electronics

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com