

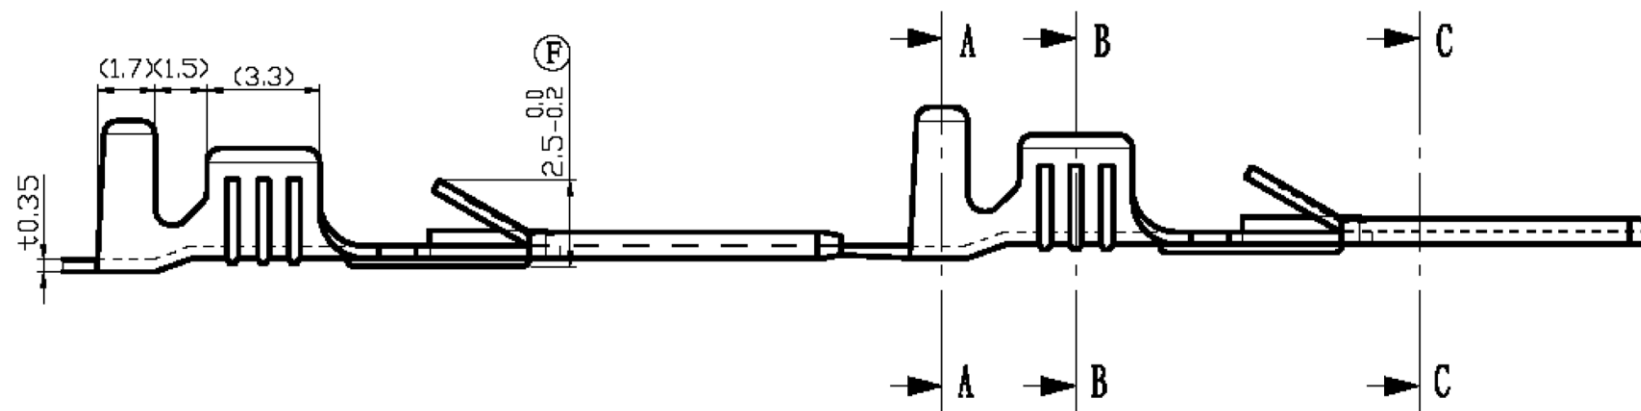


SEC. A-A



SEC. B-B

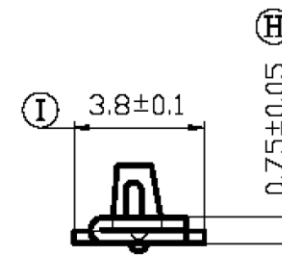

SEC. C-C

說明:
1.預鍍錫膜厚40u"以上

NOTE:
1.Pre-Tin Plated Thickness More Than 40u"

Material:Brass

Wire Range:0.85~1.25mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

<1.0 : ± 0.10
1.0~5.0 : ± 0.15
5.0~10.0 : ± 0.20
10.0~20.0 : ± 0.25
20.0~45.0 : ± 0.30
>45.0 : ± 0.50
ANGLE : ± 2.0°

照片框

ORDER INFORMATION

ISO-MT-18-LF
SERIES T T LEADFREE
18~26 AWG
TERMINAL
MALE

DESCRIPTION: Terminals for electronics