




ISO-PHC-08

ISO-PHS-08

SPECIFICATIONS
Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2

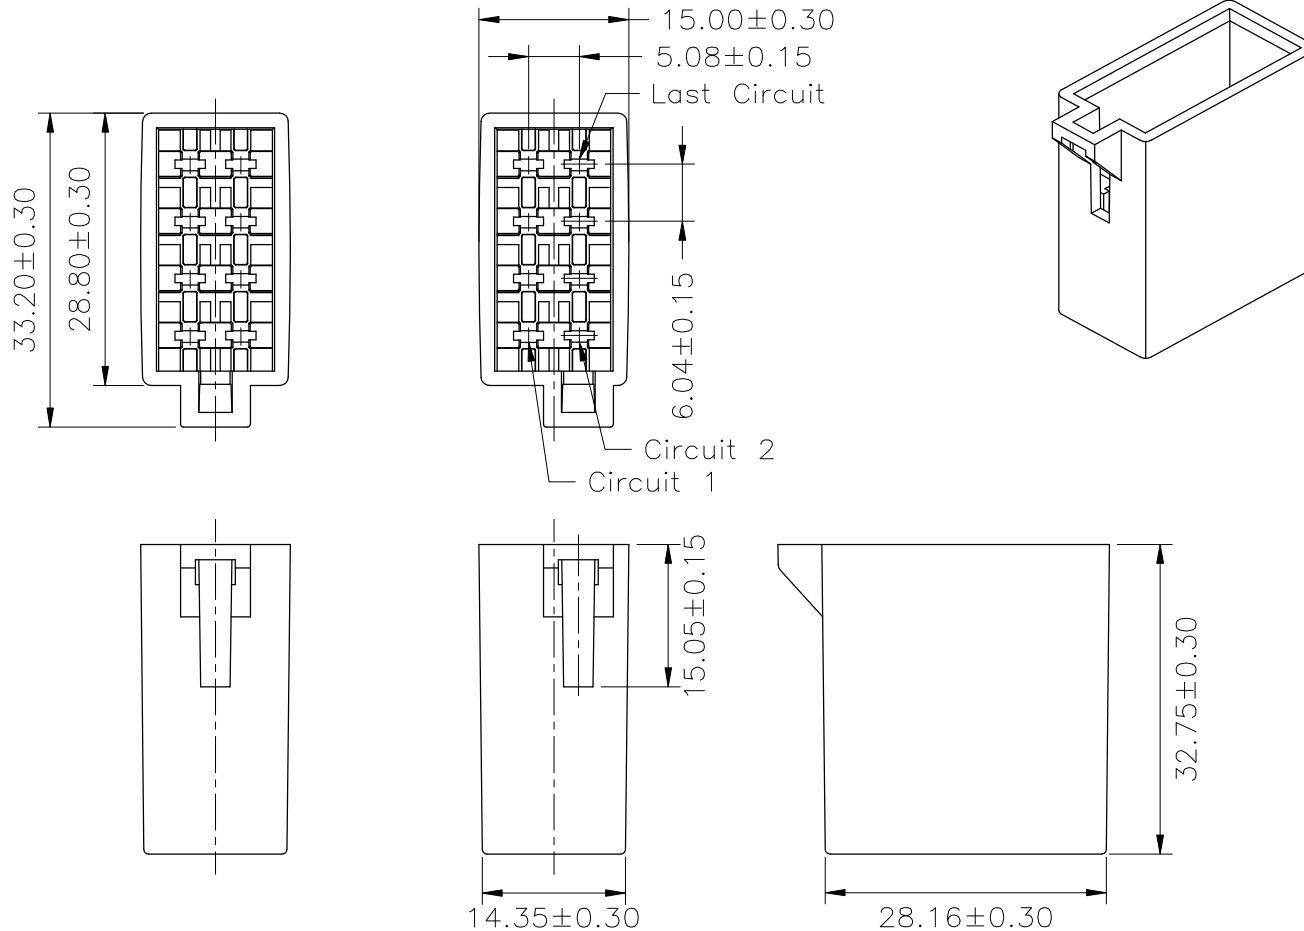

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	

TOLERANCES ARE	
X. ±	
.X ± 0.30	
.XX ± 0.20	
.XXX ±	
ANG ±	

SIZE A4 PPROJECTION

照片框

ORDER INFORMATION

ISO-PHx-08-LF		
SERIES	T	LEADFREE
	T	08 AWG
	C	C: CENTER/LOCK
	S	S: SIDE/LOCK
		HOUSING
		MALE

DESCRIPTION: 6.04-5.08mm PITCH HOUSING -PLUG