
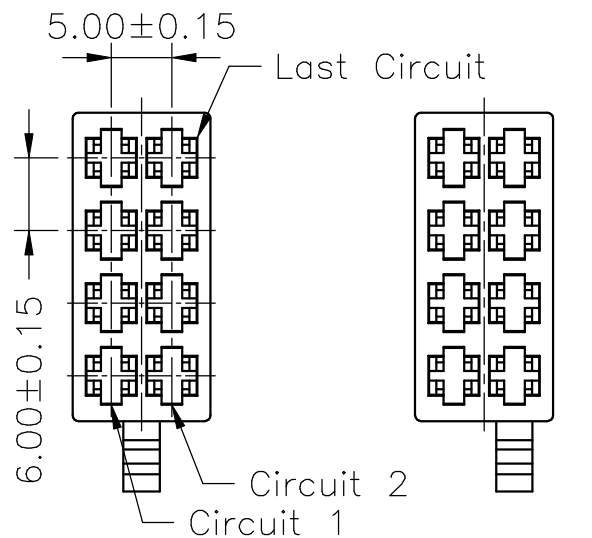



ISO-SHC-08

11.40±0.30



11.00±0.30

ISO-SHS-08

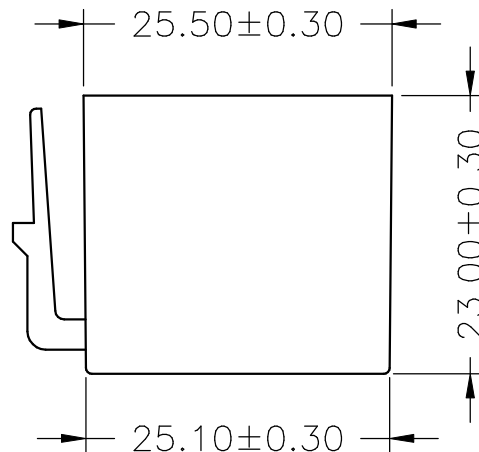

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2

Color: C -Brown

S -Black

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ISO-SHx-08-LF

SERIES
LEADFREE
08 AWG
C: CENTER/LOCK
S: SIDE/LOCK
HOUSING
FEMALE

DESCRIPTION: 6.00-5.00mm PITCH HOUSING-RECEPTACLE