


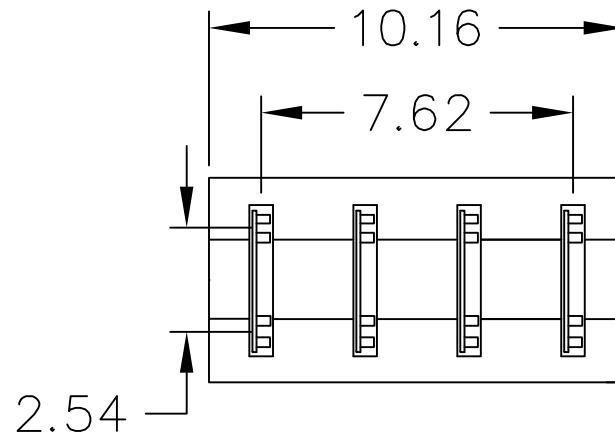

MATERIAL

Insulator : 30% Glass Filled PBT(UL 94V-0)

Contact Pin : brass




SPECIFICATION

Current Rating: 3 amperes MAX

Contact Resistance: 30mΩ MAX

Insulation Resistance: 1000 megohms Min $\triangle B$

Dielectric Withstanding Voltage: AC 650 volts
RMS at sea level

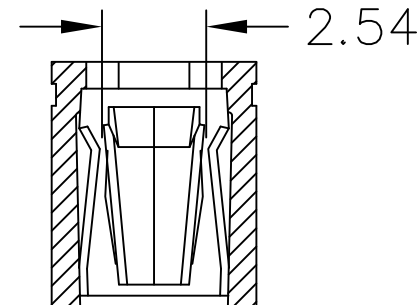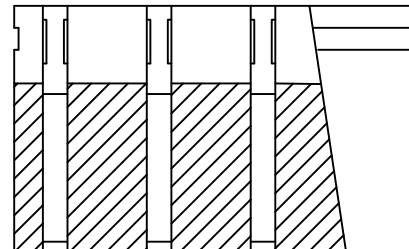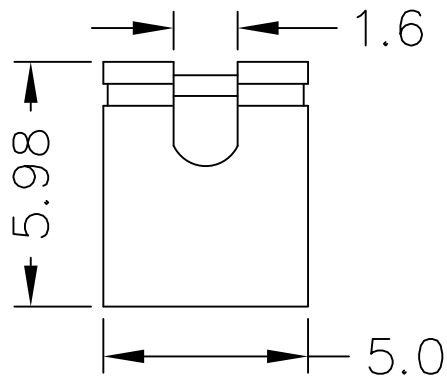

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PROJECTION Φ

照片框

ORDER INFORMATION

J-BS-2X04-LF
SERIES | LEADFREE
8 WAY
OPEN STRIP

DESCRIPTION: MINI JUMPER 2.54mm OPEN 6.0mm