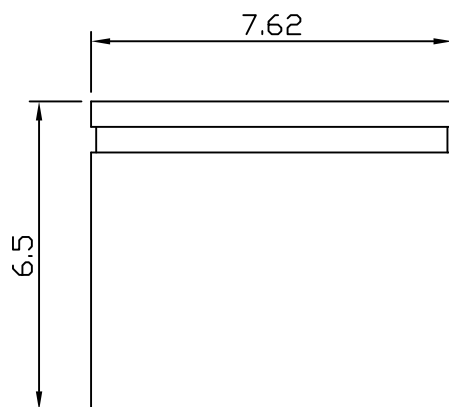
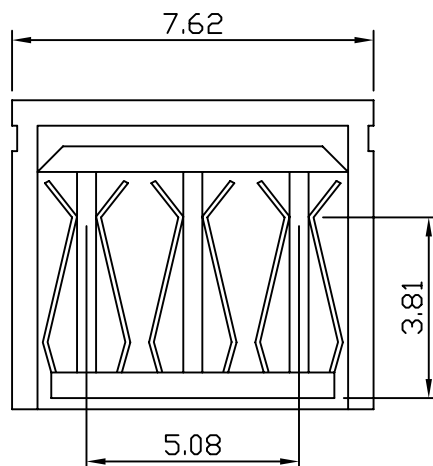


MATERIAL

Insulator : PBT+30% Glass fiber

Contact Pin : Brass

Gold flash

SPECIFICATION

Current Rate : 5 AMP

Insulation Resistance : 1000M Ω Min. at DC 500V

Contact Resistance : 30m Ω Max. at DC 100mA

Dielectric Voltage : 650V AC for one minute

Operation Temperature : -55°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°



ORDER INFORMATION

J51-A-06-LF
SERIES | LEADFREE
HIGH 6.4mm
CLOSE

DESCRIPTION: MINI JUMPER 5.08mm CLOSE 6.5mm