


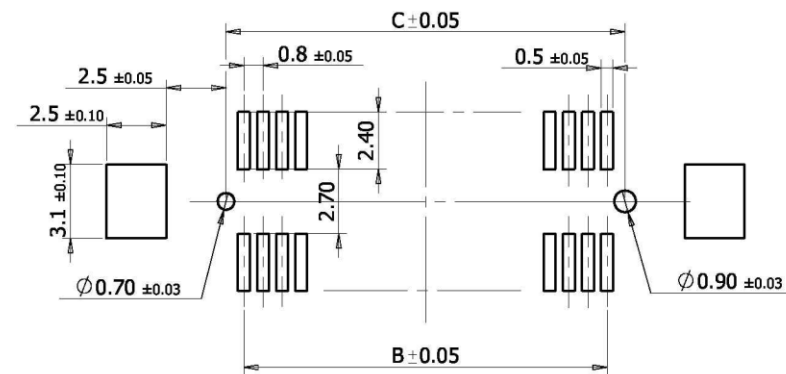

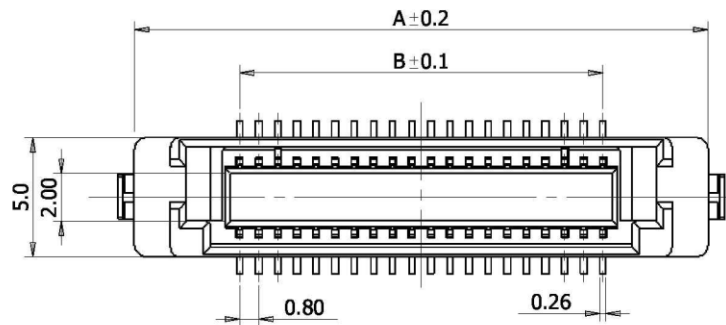
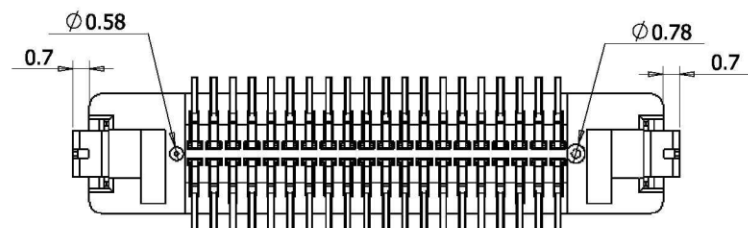




P.C.B Pattern (REF.)
component side

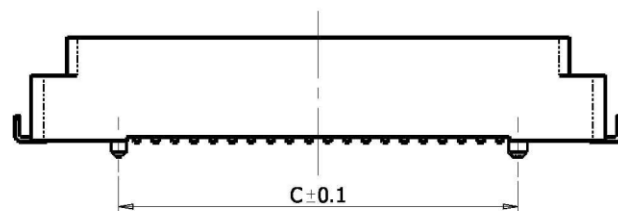

Note :
1. Coplanarity of SMT terminal is
0.1mm maximum.

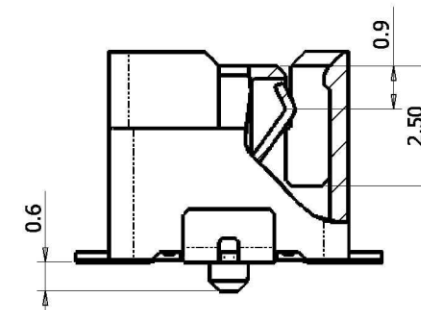

Contact area detail

Pos.	Part No.	A	B	C	Note
30	JKX-S28A-030	20.00	11.20	12.70	
40	JKX-S28A-040	24.00	15.20	16.70	
50	JKX-S28A-050	28.00	19.20	20.70	
60	JKX-S28A-060	32.00	23.20	24.70	

No.	Description	Quantity	Material	Finish	Note
3	Hold down	2	Copper Alloy	Tin over Ni	
2	Insulator	1	LCP+GF	Black	UL 94V-0
1	Terminal	Table 1	Copper Alloy	Au over Ni	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

JKX-S28A-xxx-LF
SERIES
LEADFREE
030~060WAY
POST+EAR
UNMATED HIGH 2.8mm
FEMALE

DESCRIPTION: