
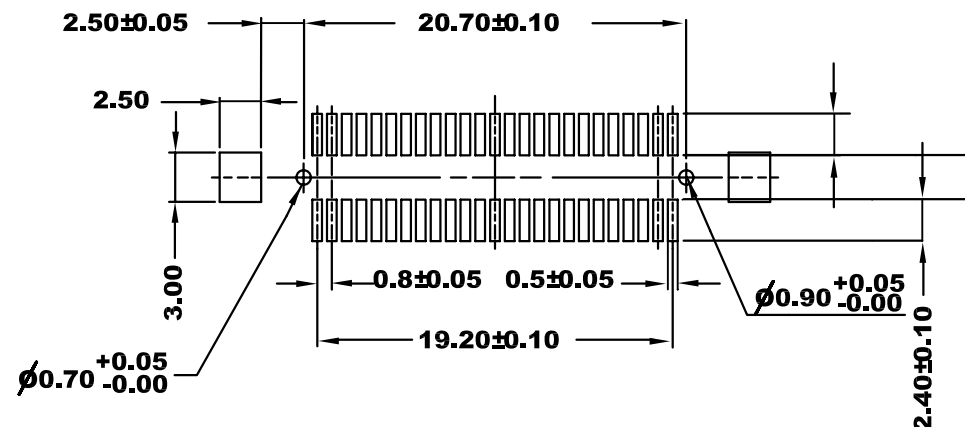


Section A-A

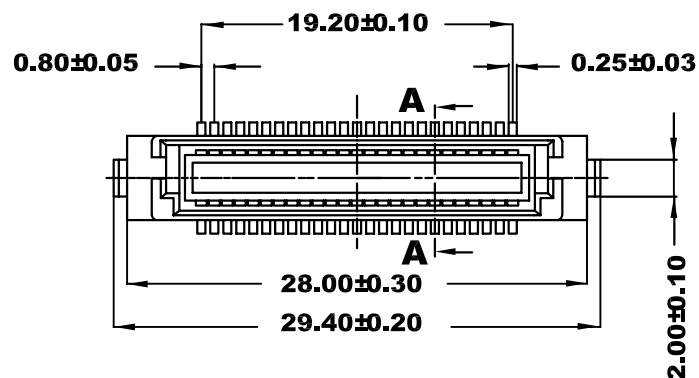

Stacking Height Code	h	H
JKX-S26-050	2.60	4.20
JKX-S33-050	3.30	4.90
JKX-S49-050	4.95	6.55

Materials

Contact: Phosphor bronze, gold plating all over, nickel under plated.

Retainer: Phosphor bronze, tin plated.

Insulator: Glass-filled LCP/Black, UL94V-0.

Rating

Current Rating: 0.5Amps.

Operating Temperature: -40 to +85°C.

Contact Resistance: 70 mΩ max.

Electrical

Terminal resistance: 70 mΩ maximum.

Insulation resistance: 100 mega Ω minimum.

Dielectric withstanding voltage: 500 VAC rms. (for one minute).

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±



ORDER INFORMATION

JKX-Sxx-050-LF

SERIES

LEADFREE

50 WAY

26: UNMATED HIGH 2.6mm

495: UNMATED HIGH 4.95mm

MALE

DESCRIPTION: 0.80mm PITCH BOARD TO BOARD 50 PIN VERTICAL SMT