


- * Housing Material:
UL94V-0 Glass fiber
reinforce polyester
- * Contact Material:
Phosphor bronze or Brass
- * Current Rating:
3 Amp (1600VAC)
- * Contact Resistance:
Less than 10 milliohms
- * Insulation Resistance:
Over 1000Ω 500VDC/1 min
- * Operation Temperature:
-55°C ~ +120°C
- * Operation Relative:
Humidity : 5 to 95% R.H.

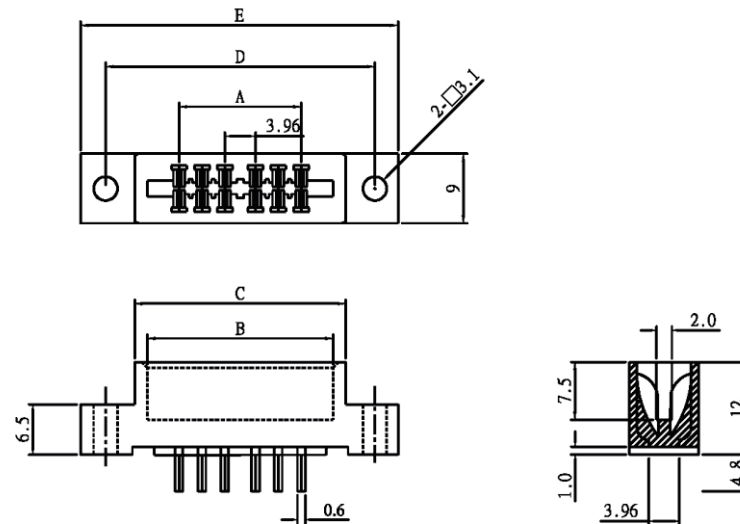

PNS	PART NO.	DIMENSION(mm)					PNS	PART NO.	DIMENSION(mm)				
		A	B	C	D	E			A	B	C	D	E
5X2 10	KE-DLE06-10	15.84	24.06	27.4	34.94	41.2	20X2 40	KE-DLE06-40	75.24	83.46	86.80	94.34	100.60
6X2 12	KE-DLE06-12	19.8	28.02	31.36	38.9	45.16	22X2 44	KE-DLE06-44	83.16	91.38	94.72	102.26	108.52
8X2 16	KE-DLE06-16	27.72	35.94	39.28	46.82	53.08	24X2 48	KE-DLE06-48	91.08	99.30	102.26	110.18	116.44
10X2 20	KE-DLE06-20	35.64	43.86	47.2	54.74	61.0	28X2 56	KE-DLE06-56	106.92	115.14	118.48	126.02	132.28
12X2 24	KE-DLE06-24	43.56	51.78	55.12	62.66	68.92	30X2 60	KE-DLE06-60	114.84	123.06	126.40	133.94	140.20
15X2 30	KE-DLE06-30	55.44	63.66	67.0	74.54	80.8	36X2 72	KE-DLE06-72	138.6	146.82	150.16	157.77	163.96
18X2 36	KE-DLE06-36	67.32	75.54	78.88	86.42	92.68	43X2 86	KE-DLE06-86	166.32	174.54	177.88	185.49	191.48

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

KE-DLE06-xx-LF
SERIES | LEADFREE
10~86 WAY
PIN 0.6mm
LOW EAR
DIP 180°

DESCRIPTION: