
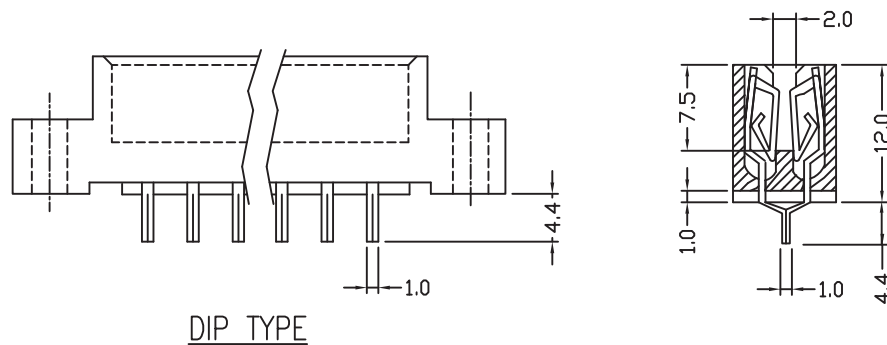


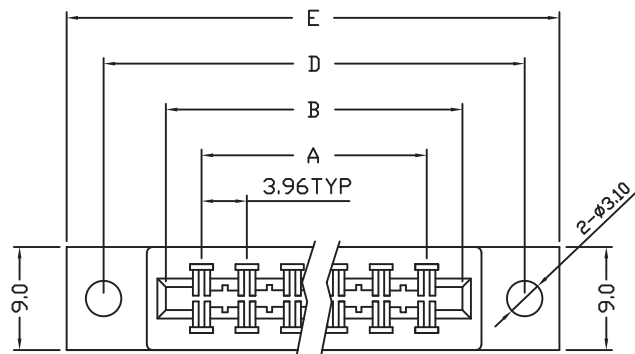

## ■ MATERIAL

INSULATOR: PBT +30% GLASS FIBER (UL94V-0).

CONTACT: PHOSPHOR BRONZE OR BRASS.

PLATING: GOLD OVER NICKEL.

## ■ SPECIFICATION

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.

CONTACT RESISTANCE: 20 MILLIOHMS MAX.

VOLTAGE : 500V FOR ONE MINUTE.

## ■ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C TO +105°C.

| Circuit | Dimension |        |        |        |        | Circuit | Dimension |        |        |        |        |
|---------|-----------|--------|--------|--------|--------|---------|-----------|--------|--------|--------|--------|
|         | A         | B      | C      | D      | E      |         | A         | B      | C      | D      | E      |
| 10      | 15.84     | 24.06  | 27.40  | 34.94  | 41.24  | 64      | 122.76    | 130.98 | 134.32 | 141.86 | 148.16 |
| 12      | 19.80     | 28.02  | 31.36  | 38.90  | 45.20  | 70      | 134.64    | 142.86 | 146.20 | 153.74 | 160.04 |
| 16      | 27.72     | 35.94  | 39.28  | 46.82  | 53.12  | 72      | 138.60    | 146.82 | 150.16 | 157.70 | 164.00 |
| 20      | 35.64     | 43.86  | 47.20  | 54.74  | 61.04  | 80      | 154.44    | 162.66 | 166.00 | 173.54 | 179.84 |
| 24      | 43.56     | 51.78  | 55.12  | 62.66  | 68.96  | 86      | 166.32    | 174.54 | 177.88 | 185.42 | 191.72 |
| 26      | 47.52     | 55.74  | 59.08  | 66.62  | 72.92  |         |           |        |        |        |        |
| 28      | 51.48     | 59.70  | 63.04  | 70.58  | 76.88  |         |           |        |        |        |        |
| 30      | 55.44     | 63.66  | 67.00  | 74.54  | 80.84  |         |           |        |        |        |        |
| 32      | 59.40     | 67.62  | 70.96  | 78.50  | 84.80  |         |           |        |        |        |        |
| 36      | 67.32     | 75.54  | 78.88  | 86.42  | 92.72  |         |           |        |        |        |        |
| 40      | 75.24     | 83.46  | 86.80  | 94.34  | 100.64 |         |           |        |        |        |        |
| 44      | 83.16     | 91.38  | 94.72  | 102.26 | 108.56 |         |           |        |        |        |        |
| 46      | 87.12     | 95.34  | 98.68  | 106.22 | 112.52 |         |           |        |        |        |        |
| 50      | 95.04     | 103.26 | 106.60 | 114.14 | 120.44 |         |           |        |        |        |        |
| 56      | 106.92    | 115.14 | 118.48 | 126.02 | 132.32 |         |           |        |        |        |        |
| 60      | 114.84    | 123.06 | 126.40 | 133.94 | 140.24 |         |           |        |        |        |        |
| 62      | 118.80    | 127.02 | 130.36 | 137.90 | 144.20 |         |           |        |        |        |        |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

KE-DLEY1-xx-LF  
SERIES | LEADFREE  
10~86 WAY  
Y TERMINAL  
LOW EAR  
DIP 180°

DESCRIPTION: 3.96 PITCH WITH MOUNTING EAR