
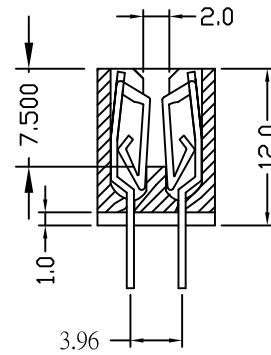
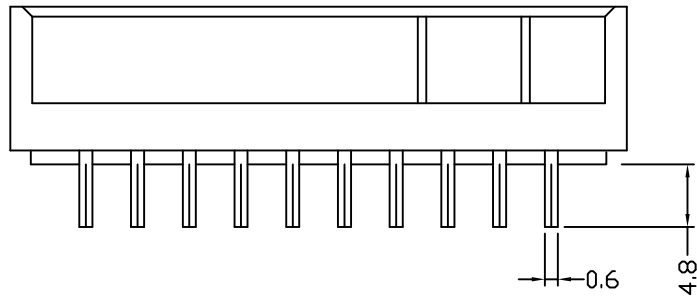


■ MATERIAL
 INSULATOR: NY-6T GLASS FIBER (1430N).
 CONTACT: PHOSPHOR BRONZE
 PLATING: GOLD OVER NICKEL.

■ SPECIFICATION
 CURRENT RATING: 3 AMP.
 INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.
 VOLTAGE : 500V FOR ONE MINUTE.

■ ENVIRONMENTAL
 TEMPERATURE RANGE: -40°C TO +125°C.

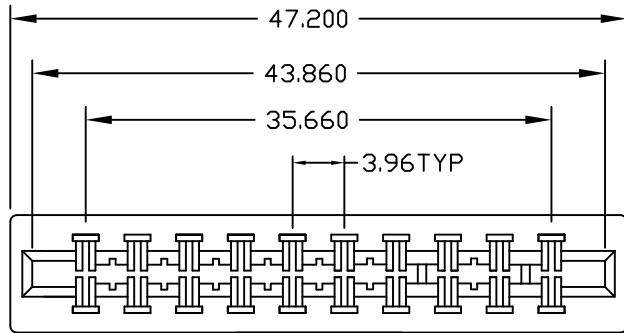

DIP TYPE

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫股份有限公司

PART NO. KE-DXE-20M13		CHECKED BY CY	TOLERANCES ARE .X ± .XX ± .XXX ± AWG	DESCRIPTION: 3.96 PITCH WITH OUT MOUNTING EAR			
DWG NO. KE-DXE-20M13							
FILE NO.		PROJECTION	AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1						