

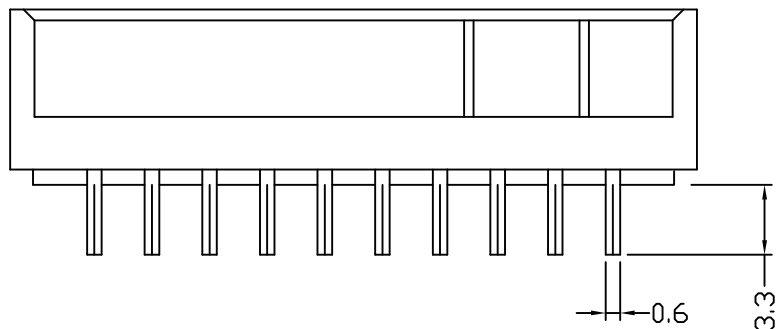


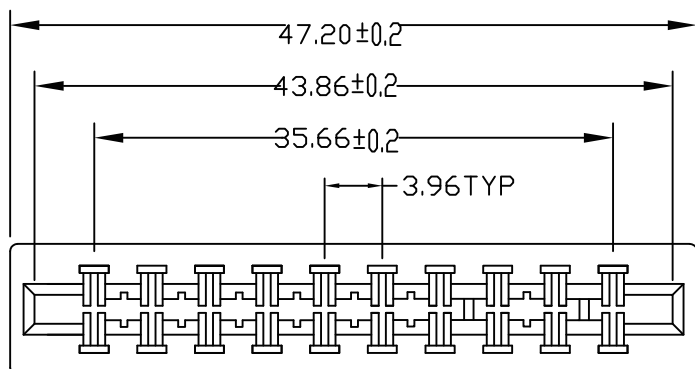

DIP TYPE

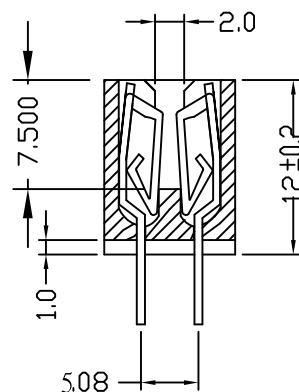

■ MATERIAL

INSULATOR: PBT GLASS FIBER (UL94V-0).

CONTACT: BRASS

PLATING: GOLD OVER NICKEL.

■ SPECIFICATION

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.

CONTACT RESISTANCE: 20 MILLIOHMS MAX.

VOLTAGE : 500V FOR ONE MINUTE.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C TO +125°C.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

KE-DXE5D33-20M13-LF
SERIES | DIP 180° | ROW PITCH 5.08mm | NON EAR
LEADFREE
20 WAY MOLDED KEY #1#3
DIP 3.3mm

DESCRIPTION: 3.96 PITCH WITH OUT MOUNTING EAR