

■ MATERIAL
 INSULATOR: PBT GLASS FIBER (UL94V-0).
 CONTACT: BRASS
 PLATING: GOLD OVER NICKEL.


■ SPECIFICATION
 CURRENT RATING: 3 AMP.
 INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.
 VOLTAGE : 500V FOR ONE MINUTE.

■ ENVIRONMENTAL
 TEMPERATURE RANGE: -40°C TO +125°C.

UNLESS OTHERWISE SPECIFIED	
0-10 ±0.2	10-30 ±0.3
30-100 ±0.4	100-300 ±0.5
OVER 300 ±0.6	ANGULAR ±0.5°

KE-DXE5xxx-20M13-LF
 LEADFREE
 BLANK:4.8mm
 D33:3.3mm

RoHS Compliant

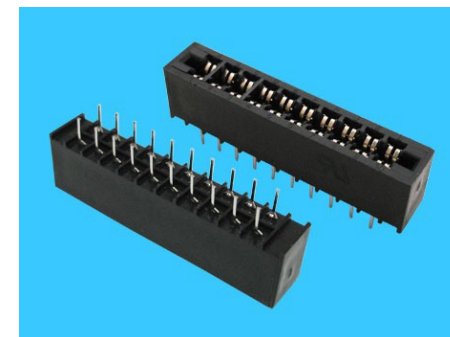

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. KE-DXE5xxx-20M13

DWG NO. KE-DXE5xxx-20M13

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION: 3.96 PITCH WITH OUT MOUNTING EAR

FILE NO.

DRAWING BY

.X ±
 .XX ±
 .XXX ±
 AWG

AREA REVISIONS HK DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA REVISIONS HK DATE