


DIP TYPE

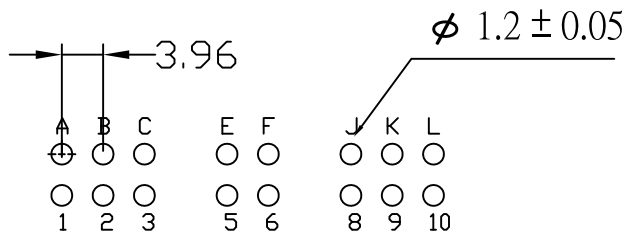

■ MATERIAL

INSULATOR: PBT +30% GLASS FIBER (UL94V-0).
CONTACT: PHOSPHOR BRONZE OR BRASS.
PLATING: GOLD OVER NICKEL.

■ SPECIFICATION

CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.
CONTACT RESISTANCE: 20 MILLIOHMS MAX.
VOLTAGE : 500V FOR ONE MINUTE.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C TO +85°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

PPOJECTION


0-10 ±0.2

30-100 ±0.4

OVER 300 ±0.6



ORDER INFORMATION

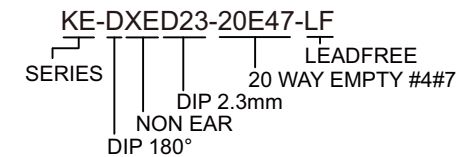

DESCRIPTION: 3.96 PITCH WITH OUT MOUNTING EAR