


DIP TYPE

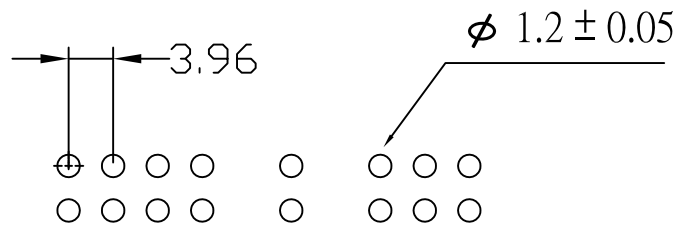

- MATERIAL
INSULATOR: PBT +30% GLASS FIBER (UL94V-0).
CONTACT: PHOSPHOR BRONZE OR BRASS.
PLATING: GOLD OVER NICKEL.
- SPECIFICATION
CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.
CONTACT RESISTANCE: 20 MILLIOHMS MAX.
VOLTAGE : 500V FOR ONE MINUTE.
- ENVIRONMENTAL
TEMPERATURE RANGE: -40°C TO +85°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

KE-DXED30-20E57-LF
SERIES | LEADFREE
20 WAY EMPTY #5#7
DIP 3.0mm
NON EAR
DIP 180°

DESCRIPTION: 3.96 PITCH WITH OUT MOUNTING EAR