

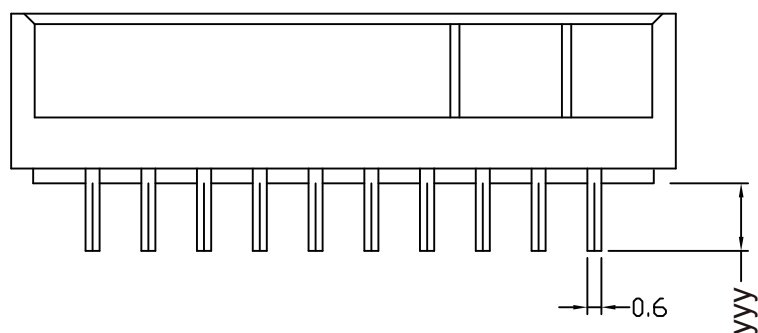


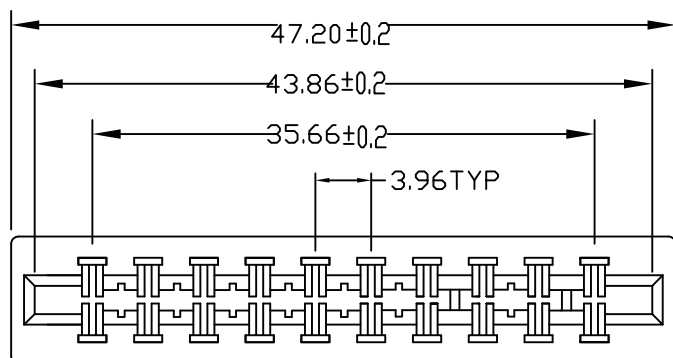

DIP TYPE

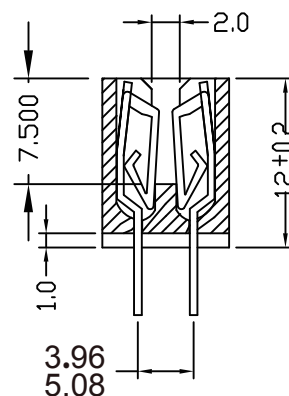

■ MATERIAL

INSULATOR: PBT GLASS FIBER (UL94V-0).

CONTACT: BRASS

PLATING: GOLD OVER NICKEL.

■ SPECIFICATION

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.

CONTACT RESISTANCE: 20 MILLIOHMS MAX.

VOLTAGE : 500V FOR ONE MINUTE.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C TO +125°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

PPOJECTION

10-30 ±0.3

100-300 ±0.5

ANGULAR ±0.5°



ORDER INFORMATION

KE-DXExyyy-20M13-LF
SERIES KE-DXExyyy-20M13-LF LEADFREE
DIP 180° 20 WAY MOLDED KEY #1#3
NON EAR BLANK:DIP 4.8mm
D33:DIP 3.3mm
BLANK:ROW PITCH 3.96mm
5:ROW PITCH 5.08mm

DESCRIPTION: 3.96 PITCH WITH OUT MOUNTING EAR