
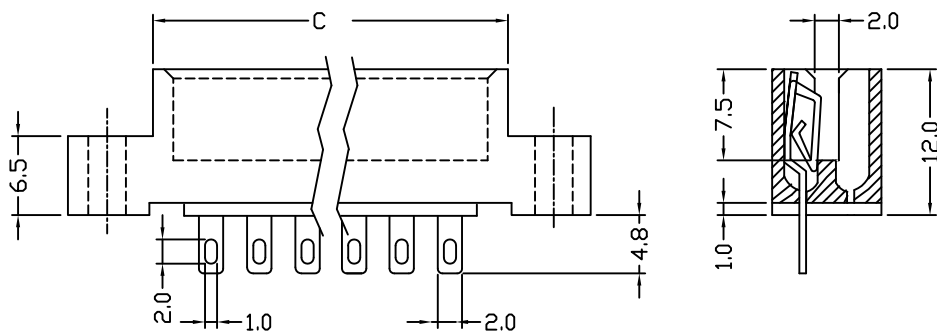


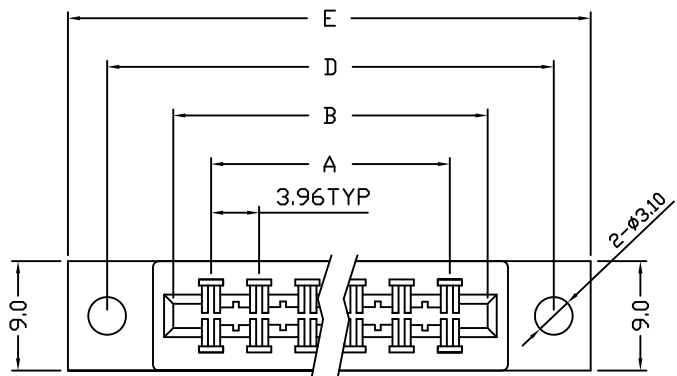

SOLDER TYPE

- MATERIAL
INSULATOR: PBT +30% GLASS FIBER (UL94V-0).
CONTACT: PHOSPHOR BRONZE OR BRASS.
PLATING: GOLD OVER NICKEL.

- SPECIFICATION
CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.
CONTACT RESISTANCE: 20 MILLIOHMS MAX.
VOLTAGE : 500V FOR ONE MINUTE.

- ENVIRONMENTAL
TEMPERATURE RANGE: -40°C TO +105°C.

Circuit	Dimension					Circuit	Dimension				
	A	B	C	D	E		A	B	C	D	E
05	15.84	24.06	27.40	34.94	41.24	32	122.76	130.98	134.32	141.86	148.16
06	19.80	28.02	31.36	38.90	45.20	35	134.64	142.86	146.20	153.74	160.04
08	27.72	35.94	39.28	46.82	53.12	36	138.60	146.82	150.16	157.70	164.00
10	35.64	43.86	47.20	54.74	61.04	43	166.32	174.54	177.88	185.49	191.48
11	39.60	47.82	51.16	58.70	65.00						
12	43.56	51.78	55.12	62.66	68.96						
14	51.48	59.70	63.04	70.58	76.88						
15	55.44	63.66	67.00	74.54	80.84						
16	59.40	67.62	70.96	78.50	84.80						
18	67.32	75.54	78.88	86.42	92.72						
20	75.24	83.46	86.80	94.34	100.64						
22	83.16	91.38	94.72	102.26	108.56						
23	87.12	95.34	98.68	106.22	112.52						
25	95.04	103.26	106.60	114.14	120.44						
28	106.92	115.14	118.48	126.02	132.32						
30	114.84	123.06	126.40	133.94	140.24						
31	118.80	127.02	130.36	137.90	144.20						

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

KE-SLE-1Xxx-LF
SERIES LEADFREE
1X05:05 WAY
1X43:43 WAY
LOW EARS
SOLDER

DESCRIPTION: 3.96 PITCH SINGLE ROW WITH MOUNTING EAR