

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C



Insulation Resistance: 1000M Ω / min.

Dielectric Withstanding Voltage: 1500V AC/ min.



Contact Resistance: 10m Ω / max.

Material

Material: Nylon66, UL94V-2

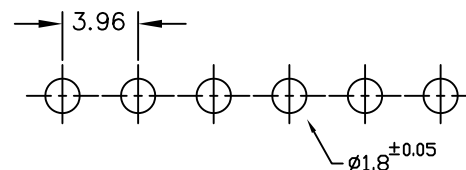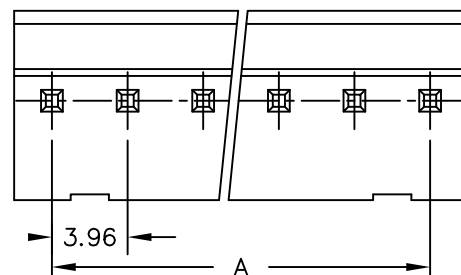

RECOMMENDED P.C.BOARD HOLE DIMM.

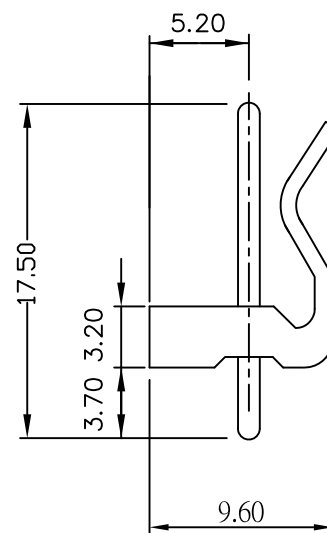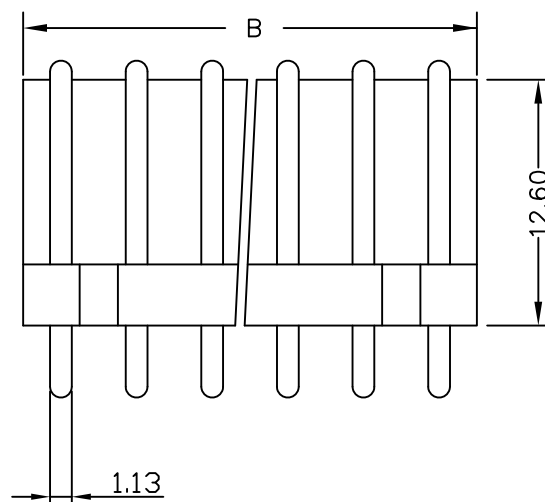

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	3.96	7.92	KK-DRP-02	
3	7.92	11.88	KK-DRP-03	
4	11.88	15.84	KK-DRP-04	
5	15.84	19.80	KK-DRP-05	
6	19.80	23.76	KK-DRP-06	
7	23.76	27.72	KK-DRP-07	
8	27.72	31.68	KK-DRP-08	
9	31.86	35.64	KK-DRP-09	
10	35.64	39.60	KK-DRP-10	
11	39.60	43.56	KK-DRP-11	
12	43.56	47.52	KK-DRP-12	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

KK-DRP-xx-LF
SERIES | LEADFREE
02~12WAY
ROUND PIN
DIP 180°

DESCRIPTION: 3.96mm Wire-to-Board Header Dip 180° Type