


Features:

- Material: Brass
- Finished: Tin-plated
- Complete line of terminal crimp equipment available
- Plating options available

Specification:


- Current rating: 7A AC, DC Max.
- Voltage rating: 250V AC,DC
- Contact resistance: Initial value/10mΩ Max.
After environmental testing/20mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Terminal retention force: 3.63Kg Min.
- Terminal crimp strength:

Wire size	Kgs	Wire size	Kgs
#26 AWG	2.72 Min.	#20 AWG	6.81 Min.
#24 AWG	3.63 Min.	#18 AWG	9.07 Min.
#22 AWG	5.45 Min.		
- Ambient temperature range: -40°C ~ 105°C

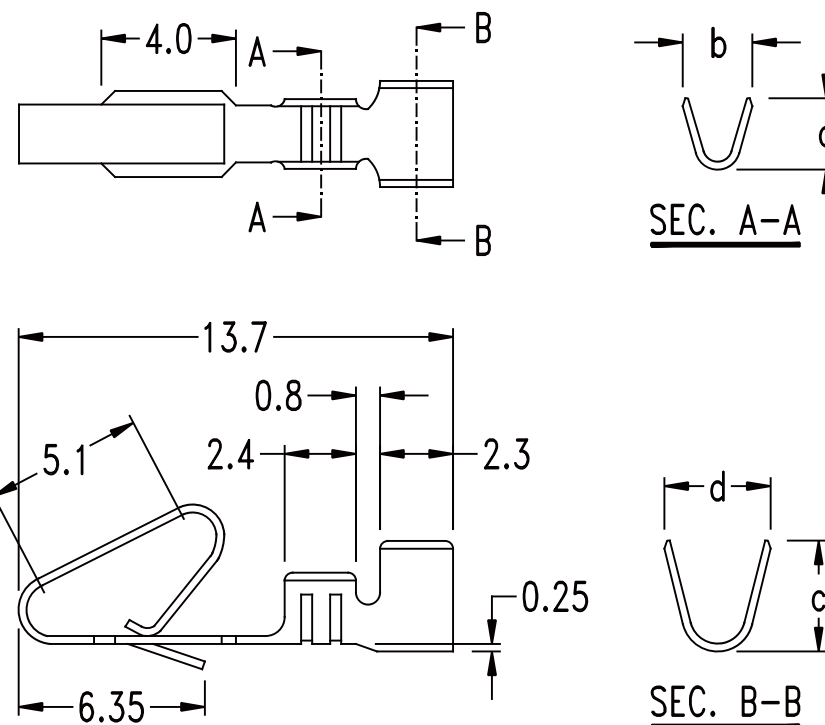

Dimensional & Ordering Information (mm)

Part No.	Dimension				Wire		Terminal	
	a	b	c	d	AWG	Insulation (O.D. Max.)	Thickness	Type
KK-T-22	1.7	2.2	2.4	2.7	#22 ~ #26	ø1.65	0.25 0.3	End-Chain
KK-T-18	2.4	2.5	3.4	3.65	#18 ~ #20	ø2.10	0.25 0.3	



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

KK-T-xx-LF
SERIES | LEADFREE
18:18~20AWG
22:22~26AWG
TERMINAL

DESCRIPTION: .156"(3.96mm) Crimp Terminal