


Features:

- 2 ~ 15 circuits available
- UL 94V-2 nylon 66
- With locking ramp
- Molded in locking arm for terminal

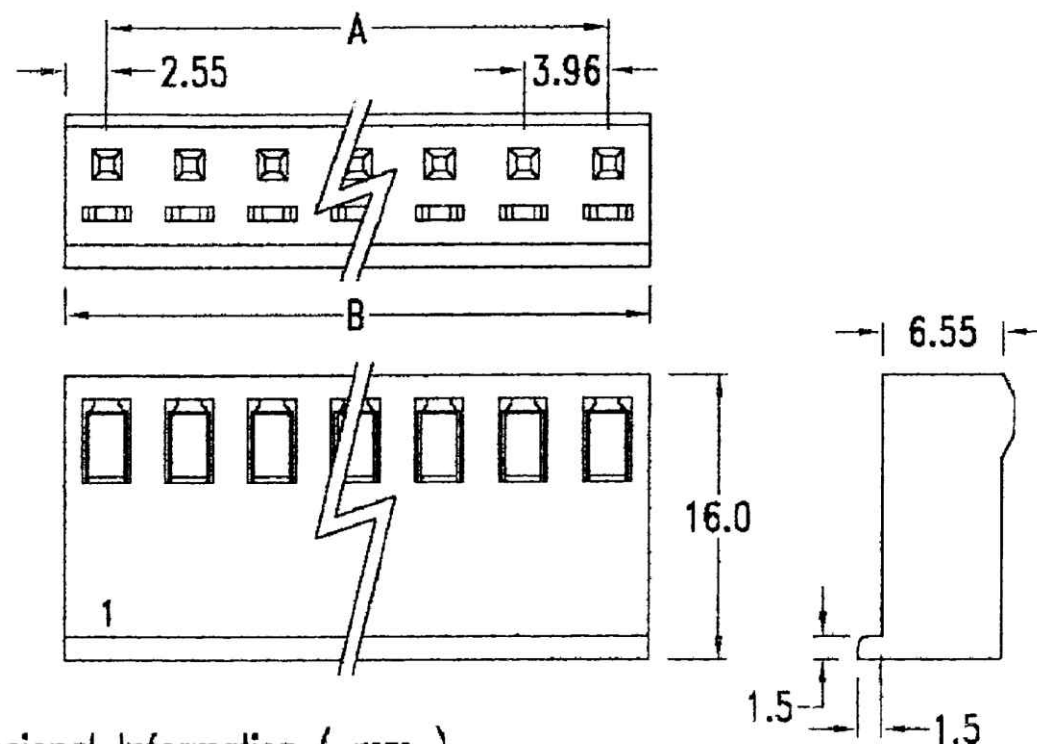

Specifications:

- Current rating: 7A max.
- Voltage rating: 250V AC max.
- Dielectric strength: 1500V AC/minute
- Insulation resistance: DC 500V, 1000M Ω min.
- Temperature range: -40 °C ~ 105 °C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.96	9.06	7	23.76	28.86	12	43.56	48.66
3	7.92	13.02	8	27.72	32.82	13	47.52	52.62
4	11.88	16.98	9	31.68	36.78	14	51.48	56.58
5	15.84	20.94	10	35.64	40.74	15	55.44	60.54
6	19.80	24.90	11	39.60	44.70			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PROJECTION

X, $\pm$
.X $\pm$ 0.40
.XX $\pm$ 0.25
.XXX $\pm$ 0.08
ANG $\pm$

照片框

ORDER INFORMATION

KKS-H-xx-LF
SERIES | LEADFREE
02~15WAY
HOUSING

DESCRIPTION: