

Features:





- 4 points contact
- Antu-fishhooking contact design
- Finished: Tin-plated (Lead free)
- Wire range: #18 ~ #28 AWG
- Thickness: 0.25mm
- Q'ty: 5000 PCS / Reel

Specification:

- Current rating: 7A
- Contact resistance: Initial 10mΩ Max.

Ordering Information

Part No.	Material	Wire range	Dim. a	Dim. b	Dim. c	Dim. d
KKS-T-18	Brass	#18 ~ #24	2.45	2.4	4.0	3.9

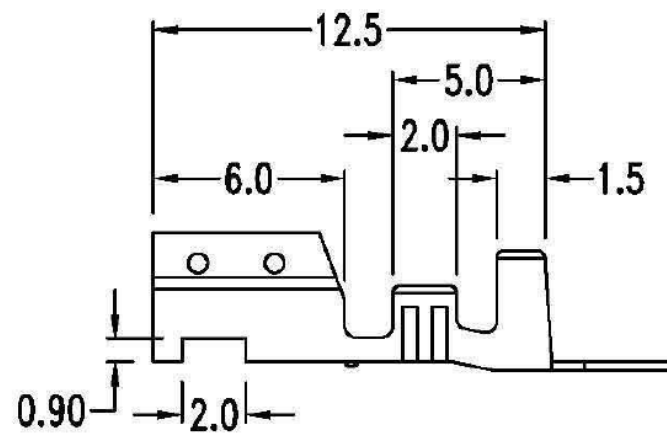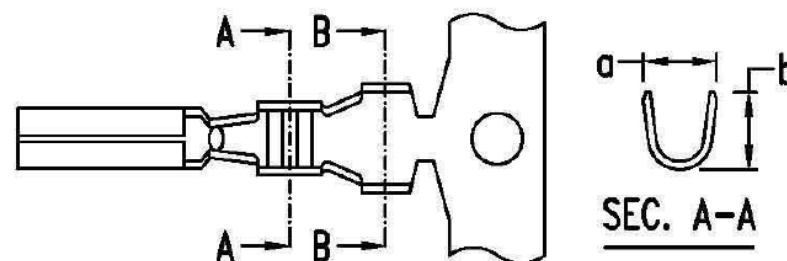

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

ORDER INFORMATION

KKS-T-18-LF
SERIES T LEADFREE
18~24 AWG
TERMINAL

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com