


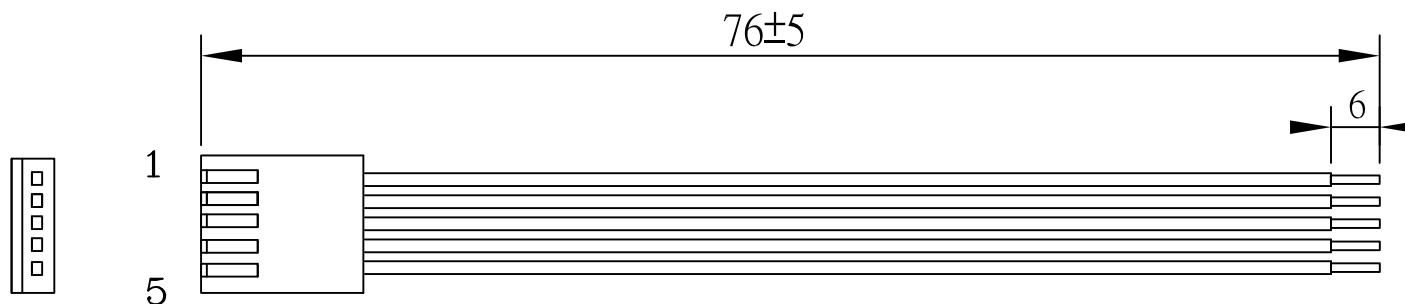

P1

P2

WIRING DIAGRAM

	P1	P2
RED	1	TIN
RED	2	TIN
BLACK	3	TIN
GREEN	4	TIN
WHITE	5	TIN

PACKAGE:

3	TERMINAL	5	PCS	KK-T-18
2	HOUSING	1	PCS	KK-H-05
1	CABLE	5	PCS	UL 1007 18AWG
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

KKX1-050018-F3N-LF

SERIES

05 WAY

18 AWG

76mm

FEMALE

LEADFREE

DESCRIPTION: MX3.96-5PH TO TIN L:76mm