

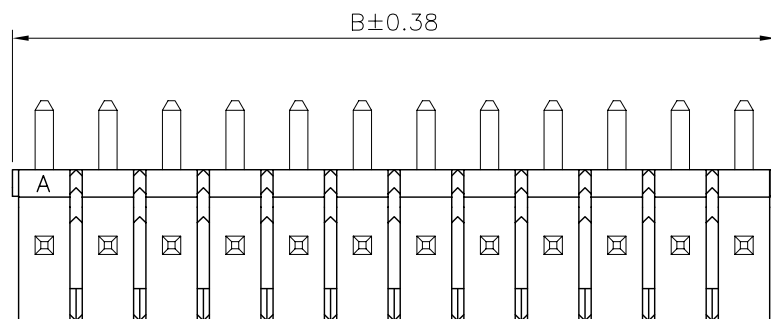
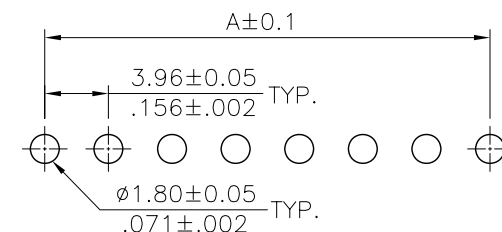


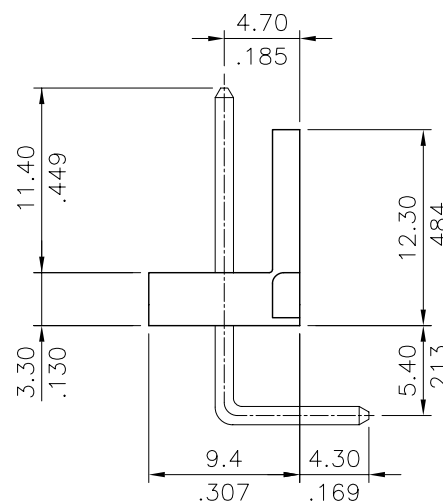

Material:

\* Insulation: Glass filled polyester UL 94V-0  
Color White(Nature)

\* Contact: Brass

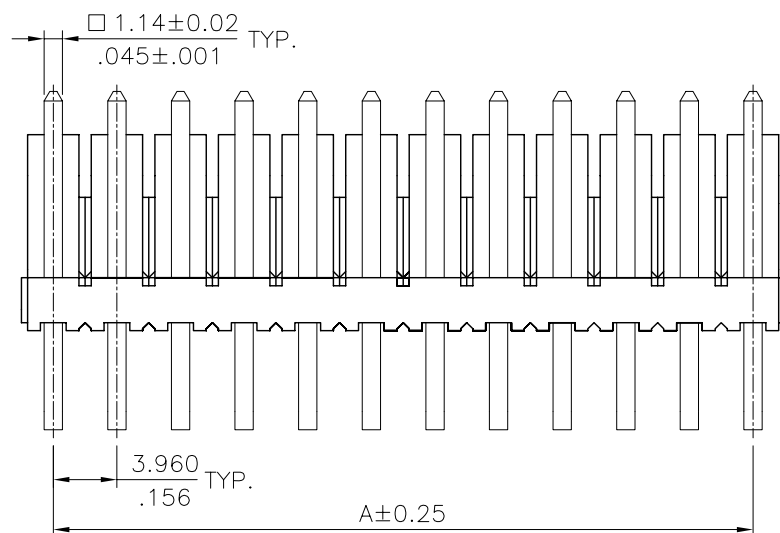

Recommended P.C. Board Layout

$A = 3.96 \times \text{No. of Spaces}$

$B = A + 3.96$

\* Available in 2 through 24 circuits

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ± 0.10  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

KT-RB-xx-LF  
SERIES LEADFREE  
02~24WAY  
BREAKAWAY  
DIP 90°

DESCRIPTION: