



Current Rating Voltage: 3 Amps 250V AC (r.m.s)
 Dielectric Withstanding: 1000 V AC
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max.
 Operating Temperature: - 40° ~ +105° C
 Contact Material:Copper Alloy
 Insulator Material:Polyester,UL 94V-0
 Standard: PBT 30% GLASS FIBER
 Finish: Standard: Gold Flash all over

◎: Table-1




CONTACTS	10 pin	14 pin	16 pin	20 pin	24 pin	26 pin
A	31.80	36.88	39.42	44.50	49.58	52.12
B	10.16	15.24	17.78	22.86	27.94	30.48
◎: C	18.00	23.08	25.62	30.70	35.78	38.32
①: D	21.78	26.86	29.40	34.48	39.56	42.10
E	27.70	32.78	35.32	40.40	45.48	48.02
◎: F	NO	NO	NO	YES	YES	YES
CONTACTS	30 pin	34 pin	40 pin	50 pin	60 pin	64 pin
A	57.20	62.28	69.90	82.60	95.30	100.38
B	35.56	40.64	48.26	60.96	73.66	78.74
◎: C	43.40	48.48	56.10	68.80	81.50	86.58
①: D	47.18	52.26	59.88	72.58	85.28	90.36
E	53.10	58.18	65.80	78.50	91.20	96.28
◎: F	YES	YES	YES	YES	YES	YES

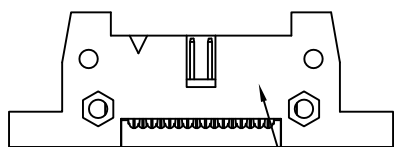

◎: F : 10P.14P.16P 無勾

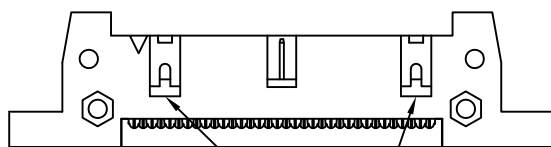

◎: F有勾

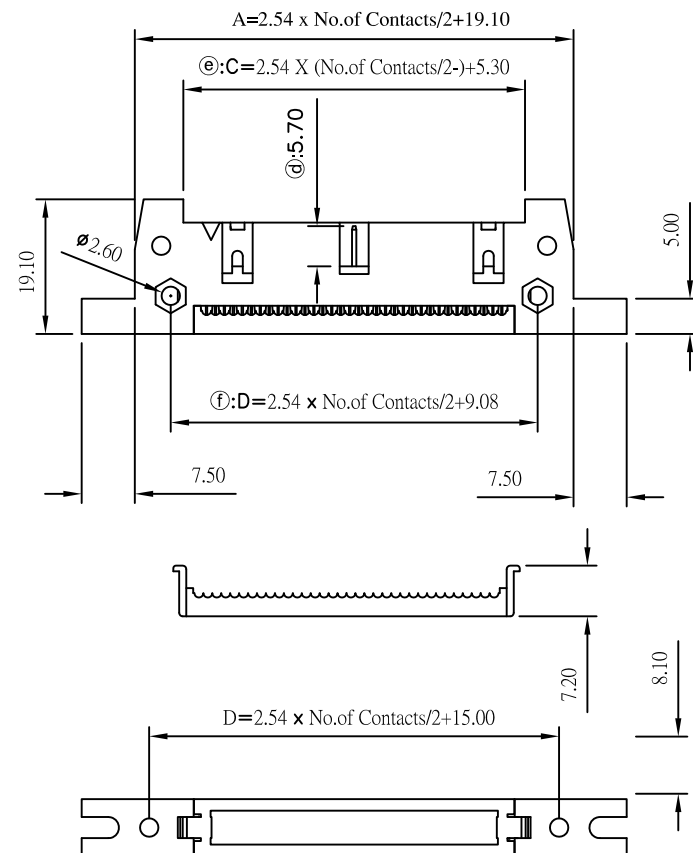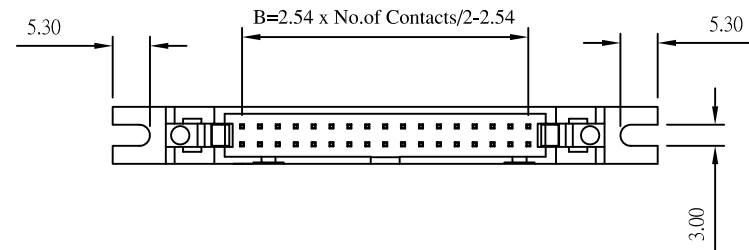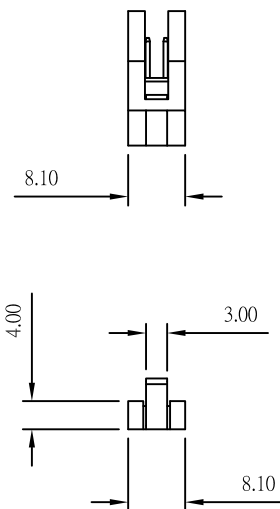

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

L-C2HEXL-xx-LF
 SERIES LEADFREE
 10~26WAY
 NON LATCH
 HALF EAR
 TWO TYPE

DESCRIPTION: