

Specifications:

Current rating:3 Amps

Dielectric Withstanding:AC 500V

Operating Temperature:-25°C ~ +105°C

Contact resistance:20mohm max.


Insulation resistance:1,000Mohm min.

Materials:

Insulator:Polyester(UL94V-0)

Contact material:Brass

Plating:Gold flash

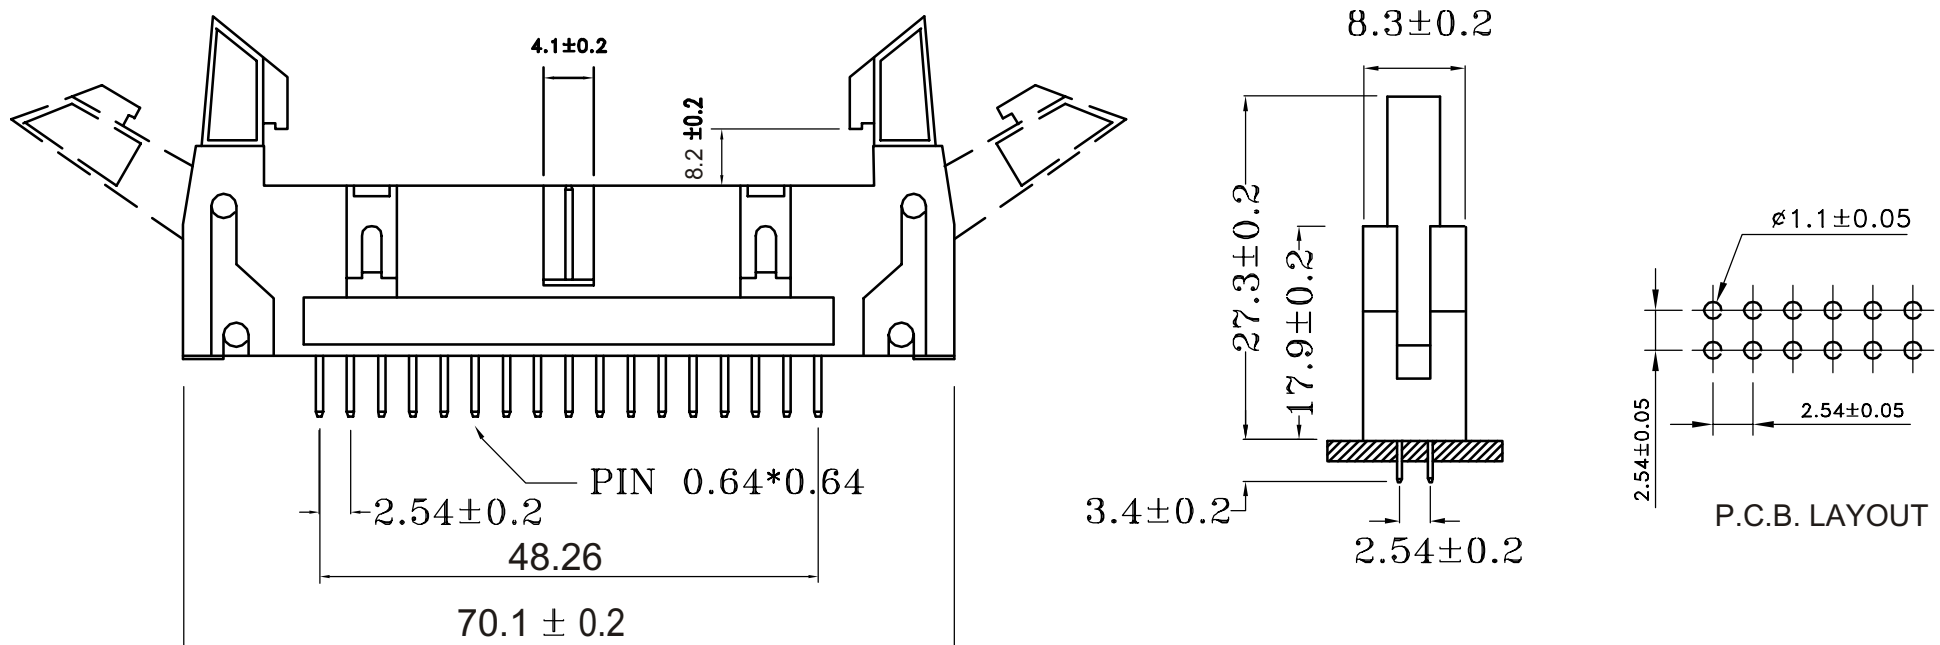

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

L-D-40-LF
SERIES | LEADFREE
40 WAY
DIP 180°

DESCRIPTION: HEADER WITH SHORT LATCH LEVERS

煜倫股份有限公司

www.morethanall.com