
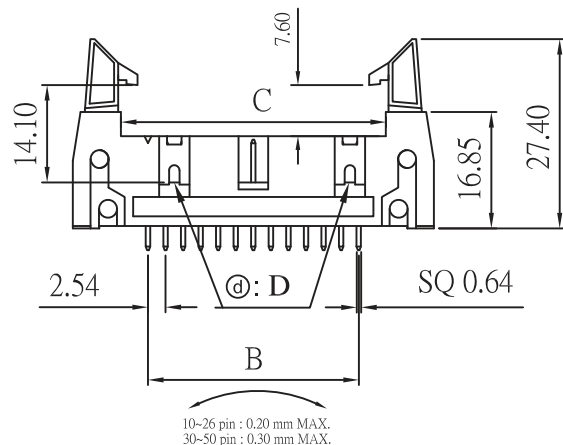
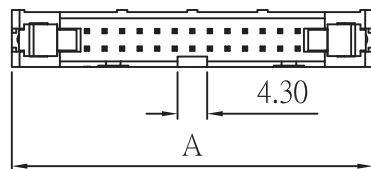

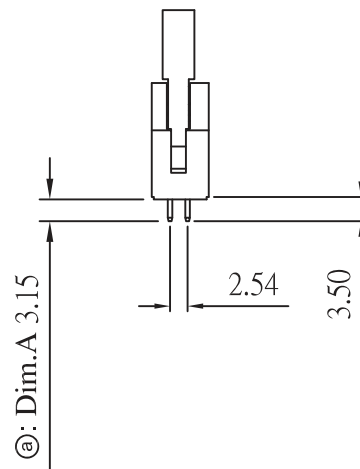


Recommended P.C. Board
Hole Layout




10P,12P,14P,16P

Current Rating Voltage: 3 Amps 250V AC (r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max.
Dielectric Withstanding: 1000 V AC
Operating Temperature: - 40° ~ +105° C
Contact Material:Copper Alloy
Standard: Brass
Insulator Material:Polyester,UL 94V-0
Standard: PBT

Finish: Standard: Gold Flash all over
Insulator Material: High Temperature
Polyester,UL 94V-0

Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds



CONTACTS	10 pin	12 pin	14 pin	16 pin	20 pin	24 pin
A	31.90	34.44	36.98	39.52	44.60	49.68
B	10.16	12.70	15.24	17.78	22.86	27.94
C	18.00	20.54	23.08	25.62	30.70	35.78
D	NO	NO	NO	NO	YES	YES
E	27.92	30.46	33.00	35.54	40.62	45.70
CONTACTS	26 pin	30 pin	34 pin	40 pin	50 pin	
A	52.15	57.40	62.38	70.00	82.70	
B	30.48	35.56	40.64	48.26	60.96	
C	38.32	43.40	48.48	56.10	68.80	
D	YES	YES	YES	YES	YES	
E	48.24	53.32	58.40	66.02	78.72	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框




ORDER INFORMATION

L-DGE-xx-LF
SERIES LEADFREE
10~50 WAY
GREY
DIP 180°


DESCRIPTION:

Current Rating Voltage: 3 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max.
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Copper Alloy
 Standard: Brass
 Insulator Material: Polyester, UL 94V-0
 Standard: PBT
 Finish: Standard: Gold Flash all over
 Insulator Material: High Temperature
 Polyester, UL 94V-0
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

CONTACTS	60 pin	64 pin
A	95.60	100.7
B	73.66	78.74
C	81.82	86.90

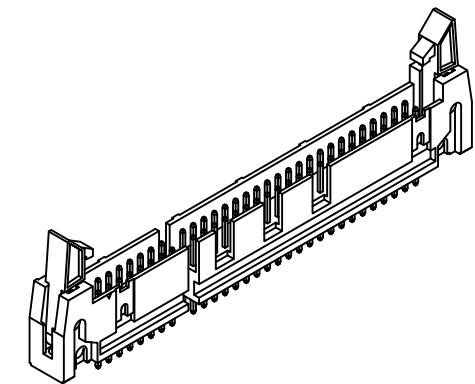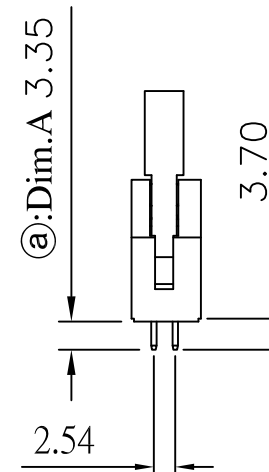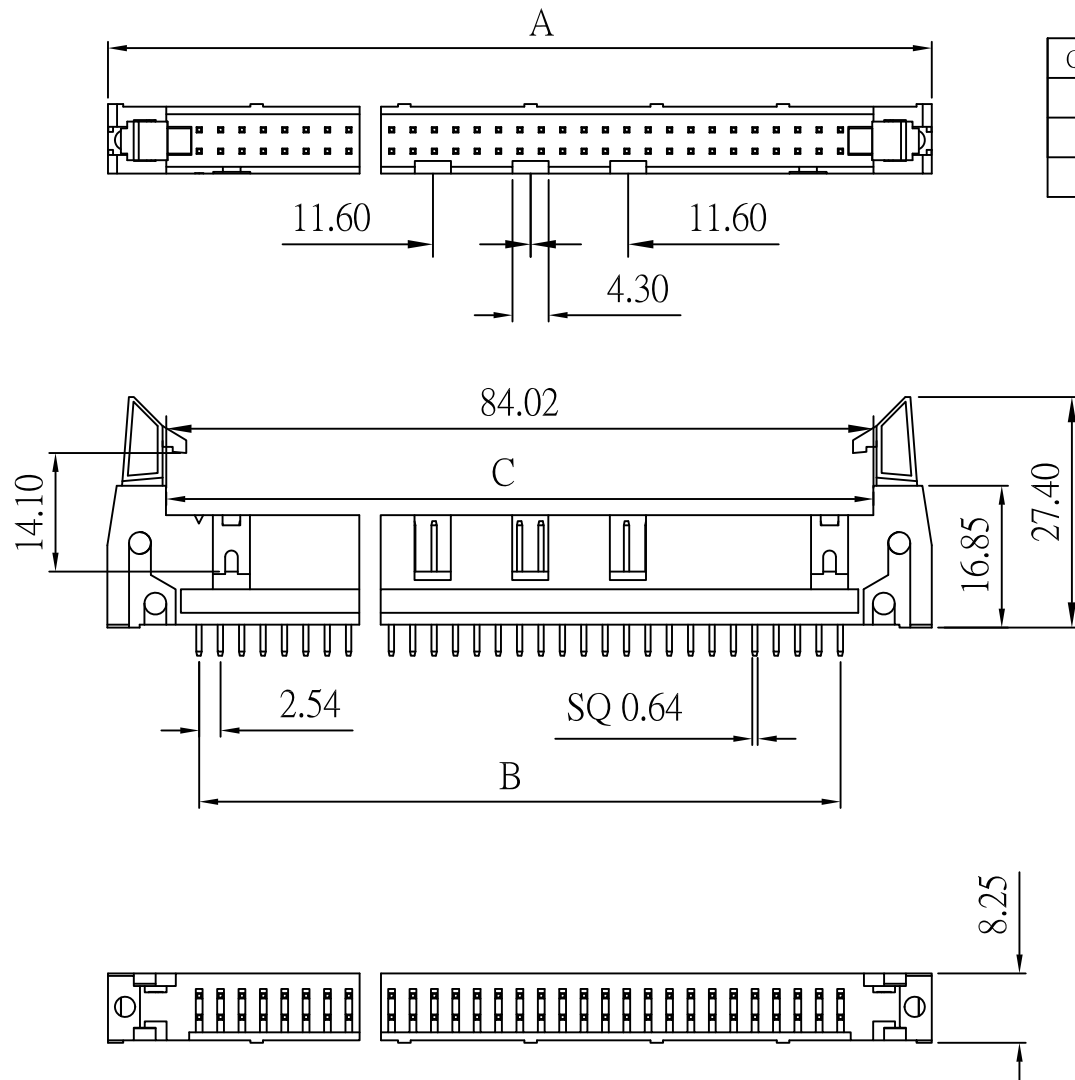

Recommended P.C. Board
 Hole Layout

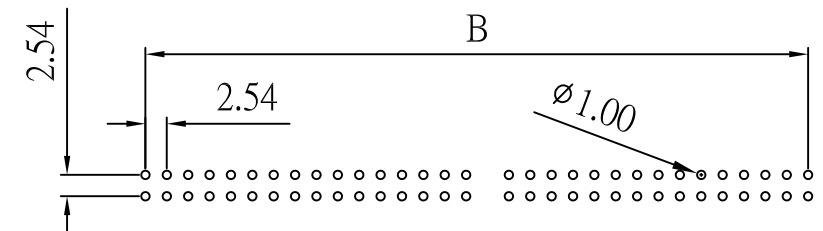

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

L-DGE-xx-LF
 SERIES T LEADFREE
 GRAY 60.64 WAY
 DIP 180°

DESCRIPTION: