


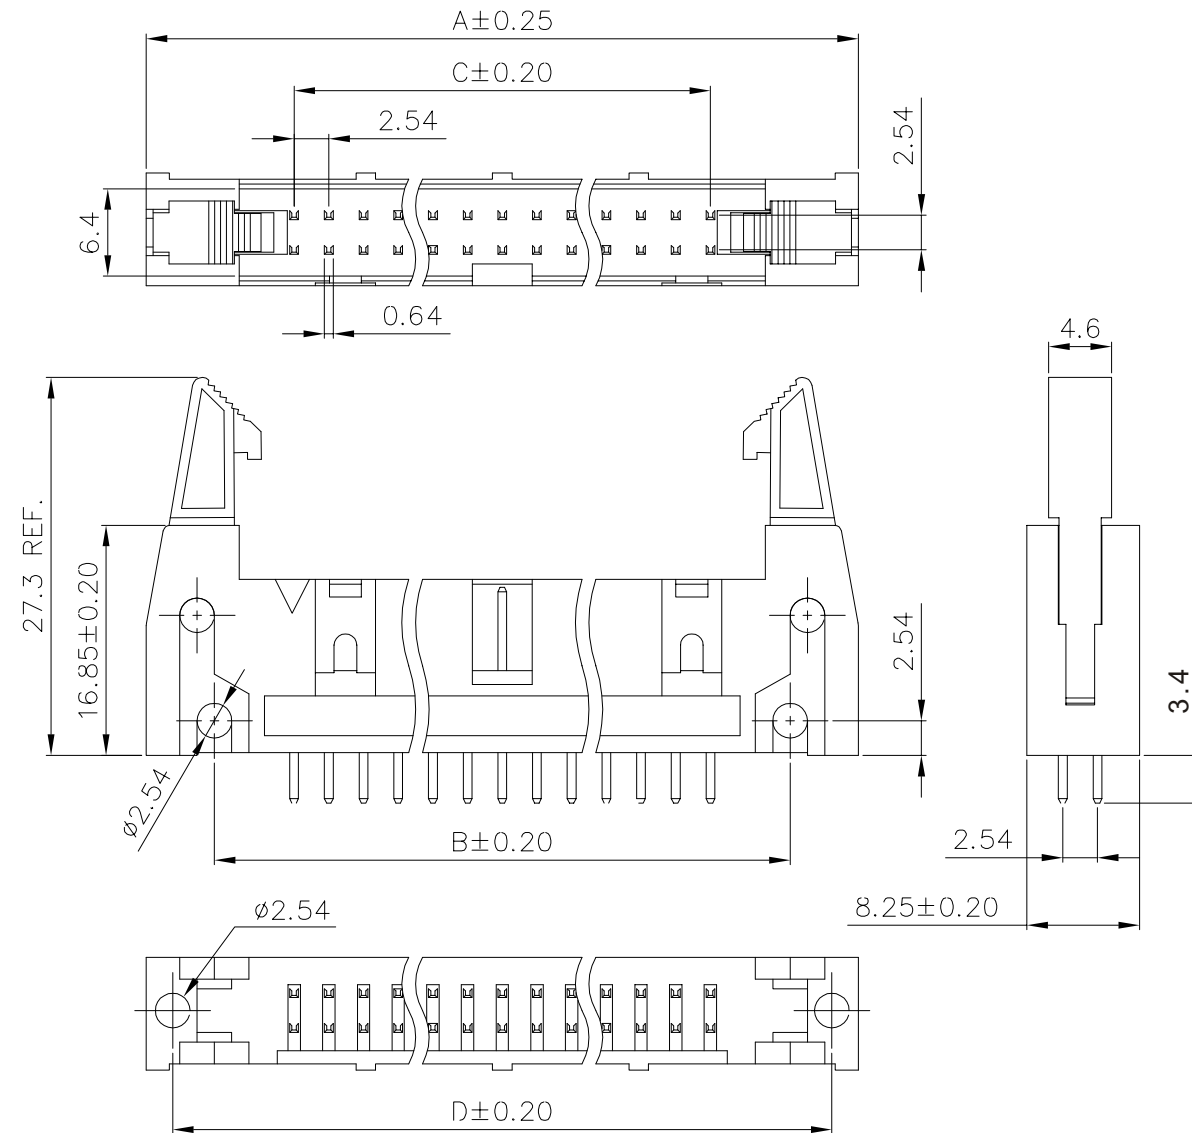

Material:
 Insulator: PBT+30% Glass Fiber (UL94V-0).
 Contact: Copper Alloy.
 Contact Plated: Gold or Tin over Nickel Plated.
 Specification:
 Current Rating: **3 Amp.**
 Withstanding Voltage: AC 500V for 1 Minute.
 Insulation Resistance: 1000M Ω Min. at DC 500V.
 Contact Resistance: 15m Ω Max.
 Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$.

Pos.	Dim. A	Dim. B	Dim. C	Dim. D
10	31.90	21.84	10.16	27.94
14	36.98	26.92	15.24	33.02
16	39.52	29.46	17.78	35.56
20	44.60	34.54	22.86	40.64
24	49.68	39.62	27.94	45.72
26	52.22	42.16	30.48	48.26
30	57.30	47.24	35.56	53.34
34	62.38	52.32	40.64	58.42
40	70.00	59.94	48.26	66.04
50	82.70	72.64	60.96	78.74
60	95.40	85.34	73.66	91.44
64	100.48	90.42	78.74	96.52

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

照片框

ORDER INFORMATION

L-DSxx-xx-LF
 SERIES | T | LEADFREE
 10~64 WAY
 S15:SEMI GOLD 15u"
 S30:SEMI GOLD 30u"
 DIP 180°

DESCRIPTION: