

CONTACTS	64 pin
A	100.7
B	78.74
C	86.90

Current Rating Voltage: 3 Amps 250V AC (r.m.s)

Insulator Resistance: 5000 Megohms min

Contact Resistance: 20 m ohms max.

Dielectric Withstanding: 1000 V AC

Operating Temperature: - 40° ~ +105° C

Contact Material: Copper Alloy

Standard: Brass

Insulator Material: Polyester, UL 94V-0

Standard: PBT



Finish: Standard: Gold Flash all over

Insulator Material: High Temperature


Polyester, UL 94V-0

Max Processing Temp: 230° C for 60 seconds

Max Processing Temp: 260° C for 10 seconds

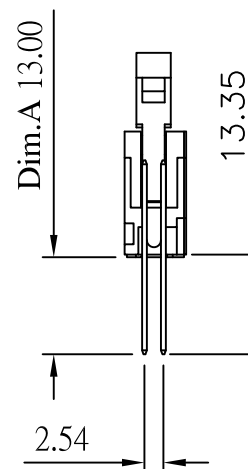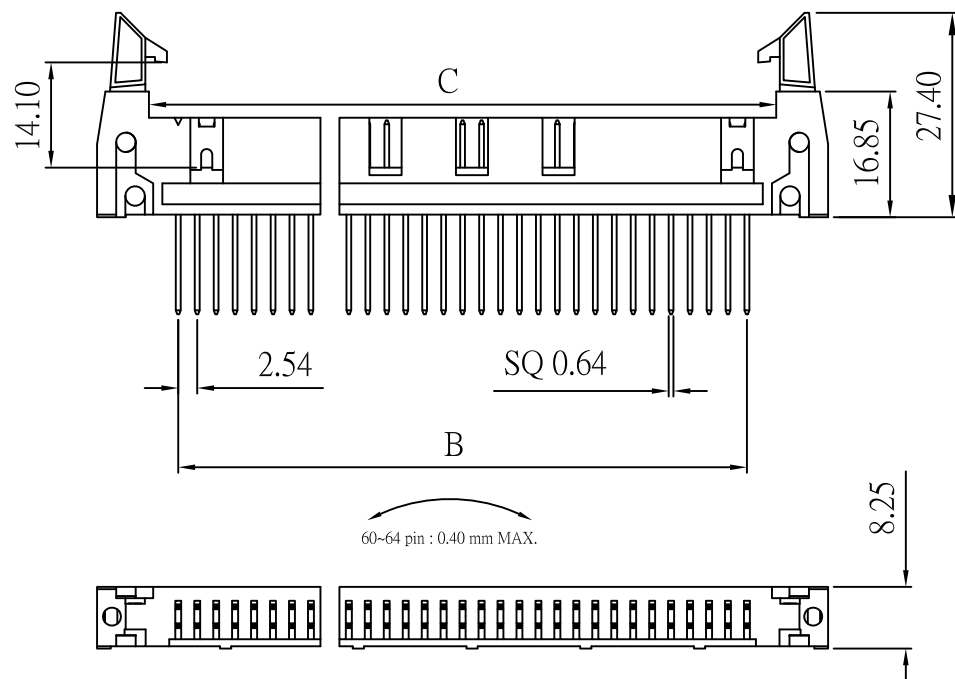

Recommended P.C. Board
Hole Layout

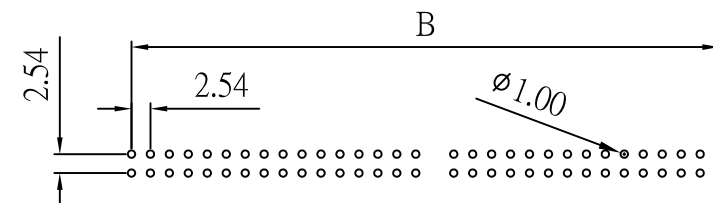

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

L-DW13-64-LF
SERIES LEADFREE
64WAY
LONG 13.35mm
WIRE WRAP
DIP 180°

DESCRIPTION: